



# LED LIGHTING SOLUTIONS

*Precision Lighting for Naval Defense Platforms*



## ***SSL-M24 Single Low Voltage***

**Symbol 331.1 & 331.2, Equivalent**

### **Features**

Power: 20-30VDC (Single Array)  
Dual Shock Mounts  
Light weight, Under 7lbs  
Stainless Steel Fasteners  
Color Options: White, Red & NVD CYAN (NV)  
Battery Backup - 5 Hours  
Die Cast Aluminum Construction  
LSTHOF-3 and LSFHOF-3 Cable Available  
7XW-3 EM Cable  
White Diffusing Lens  
Marine Grade White Powder Coating Finish  
MIL-DTL16377 Compliant



## Ordering Part Number

SSL-M241VDC

331.1	<b>S</b>	<b>WH</b>	<b>S</b>	<b>0</b>
331.2	Standard Mount	White	DPST Switch	No Cable
331.1EM	<b>F</b>	<b>BL</b>	<b>SS</b>	<b>LST10</b>
331.2EM	Flush Mount	Blue	Two DPST Switches	10' LSTHOF-3 Cable
**347.2		<b>RD</b>		<b>LST15</b>
**347.3		Red		15' LSTHOF-3 Cable
		<b>NV</b>		<b>LSH10</b>
		Night Vision		10' LSFHOF-3 Cable
				<b>LSF10</b>
				10' LSFHOF-10'
				<b>7XW3</b>
				EM Cable
				<b>DM</b>
				0-10V Dimming

\*EM units will be provided with 7XW-3 Cable.


\*\*Symbols 347.2 and 347.3 refer to prismatic lens fixtures, which are no longer necessary due to LED technology. Orders placed for either symbol will be shipped with our diffused lens

## Configuration Example

**Part No.** SSL-M241VDC-331.1-S-WH-S-LST10

**Description** LED 2', Single, 24VDC, 331.1, Standard Mount, White (4100K), DPST Switch, 10' LSTHOF-3 Cable

## Symbol 331.1/347.2 Standard Mount

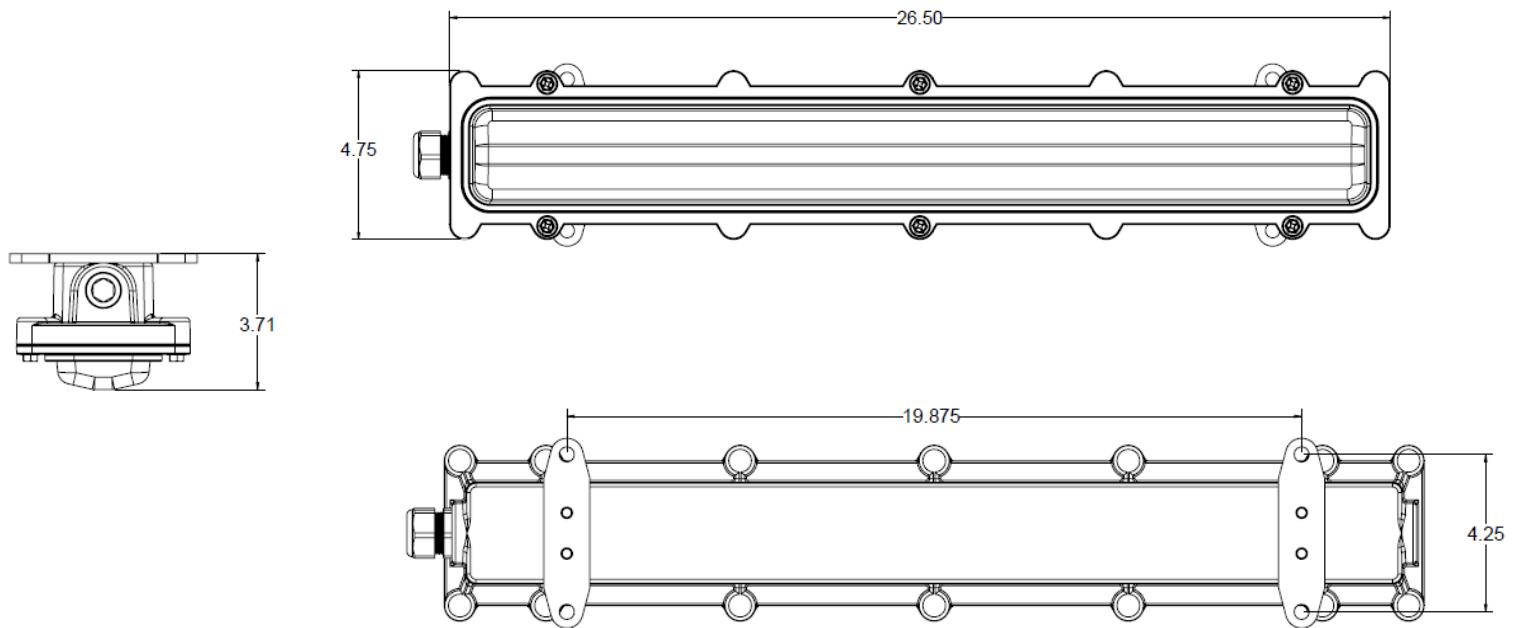

## Symbol 331.2/347.3 Standard Mount

