



## SSL-220 HP Flood

### Product Features

- 120/277 or 347/480VAC 50/60Hz
- 81,124, 175, 234, 346 484 Watts
- IP66/67
- UL1598/A, UL844 Class 1, Div 2 (A,B,C,D)
- Temp -40C - +65C
- 5000K (Amber Color Optional)
- 150,000 Hours (L70)
- 28lbs (Single Head) - 50lbs (Dual Head)
- A360 Die Cast Aluminum Construction
- Dimmable Driver (0-10V)
- 10K Surge Protection
- 2 3/4" Input Cable Entry
- Beam Pattern: NEMA 4, 6, 7x6, Asymmetric, Asymmetric Wide
- ABS
- MIL-DTL-16377 Compliant



# Ordering Part Number

SSL-220 50

<b>81</b>
13,200 Lumens
<b>124</b>
19,100 Lumens
<b>175</b>
25,000 Lumens
<b>234</b>
31,600 Lumens
<b>346</b>
51,000 Lumens
<b>484</b>
65,000 Lumens

<b>LV</b>
120/277VAC
<b>HV</b>
347/480VAC

<b>4</b>
60 Deg. Med
<b>6</b>
120 Deg. Wide
<b>7</b>
130 Deg. Very Wide

<b>YMS</b>
Yolk Mount Straight
<b>YMA</b>
Yolk Mount Angle
<b>SF</b>
Slipfitter 1-1/4 - 2 3/8 OD

<b>ND</b>
Non-Dimming
<b>DM</b>
Dimming Driver


<b>NV</b>
No Visor
<b>VS</b>
Visor

## Configuration Example


**Part No.** SSL-220-124-50-LV-4-YMS-ND-VS

**Description :** LED High Powered Flood, 124 Watts, 5000K, 120/277VAC, 60 Deg. Beam, Yolk Mount Straight, Non-Dimming, Visor

## Dimensions

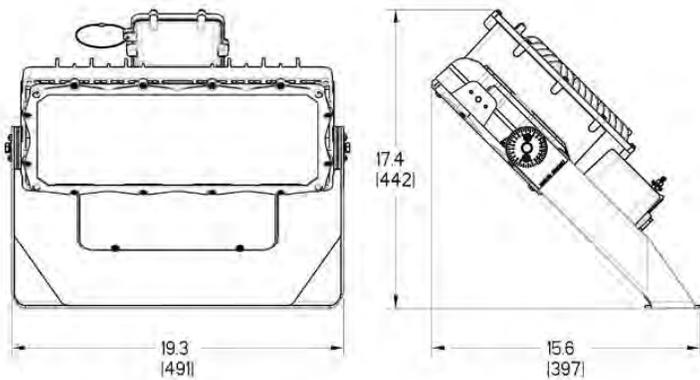

Dimensions in inches [mm]

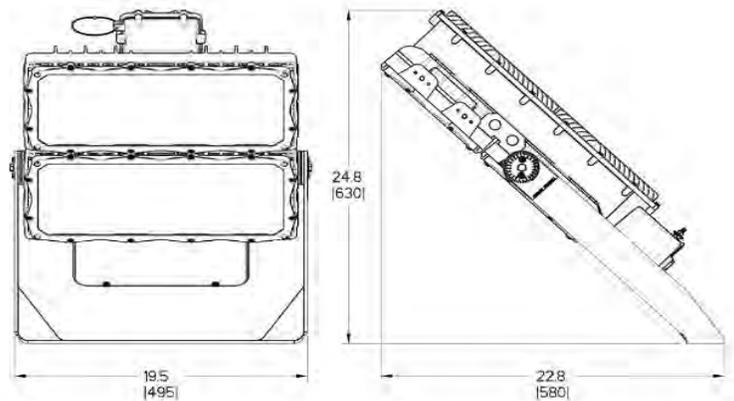

Dimensions in inches [mm]