



LED LIGHTING SOLUTIONS

Precision Lighting for Naval Defense Platforms



LLS360 Low Voltage

Product Features

- Power: 20-30VDC
- 0-10V Dimming
- UL 1598
- UL 1598A
- UL8750
- UL 844 Class 1, Division 2 (A,B,C & D)
- ABS
- MIL-16377 Compliant
- IP66/67
- Emergency Battery Backup (4-6 Hour)
- 5lbs (w/o Cable)
- A360 Die-Cast Aluminum Body
- Marine Grade Powder Coating
- Polycarbonate Lens
- Stainless Steel Hardware
- 3/4" Input Port
- Flush or Standard Configurations



©LEDLIGHTINGSOLUTIONS DIRECT.Info@1LLS.com OFFICE.855.309.1702 FAX.941.296.7313
WWW.LEDLIGHTINGSOLUTIONS.COM

All rights reserved. LED Lighting Solutions reserves the right to change specifications for product improvement without prior notice

Ordering Part Number

LLS360

40

MILX124 Sym. 331.1/24VDC	8 Medium Lens	SD Standard Mount	0 No Cable	EM Emergency	S Switch	AO All one Bracket
MILX224 Sym. 77.4/24VDC	F Flat Lens	FD Flush Mount	LST10 10' LSTHOF-3 Cable	EM4 1000lm/4 Hour EM	SS Switched	TL Task Lighting
MILX324 Sym. 333.1/24VDC			LST15 15' LSTHOF-3 Cable	EM6 6 Hour EM		C1D2 HAZLOC
MILX424 4,100 Lm/24VDC			LSH10 10' LSFHOF-3 Cable	EM6R 6 Hour EM Red		DA Dampa
MILX524 5,100 Lm/24VDC			LSF10 15' LSFHOF-10'	RE Remote EM		DM 0-10V Dimming
MILX624 6,100 Lm/24VDC			7XW3 EM Cable	*CW/GW NVD Cyan (NV) White		
				RR Red/Red		
				RW Red/White		
				RW10 Red/White -10W Red		
				RW40 Red/White -40W Red		

and GW are Interchangeable

*CW and GW are Interchangeable


Configuration Example

Part No. LLS360-MILX324-8-40-SD-LST15-S-DM

Description : LLS360, MILX3, 24VDC, Medium Lens, 4100K, Standard Mount, 15' LSTHOF-3 Cable, Switch, 0-10V Dimming

Any options not chosen can be left blank when building part number

Standard/Medium Lens

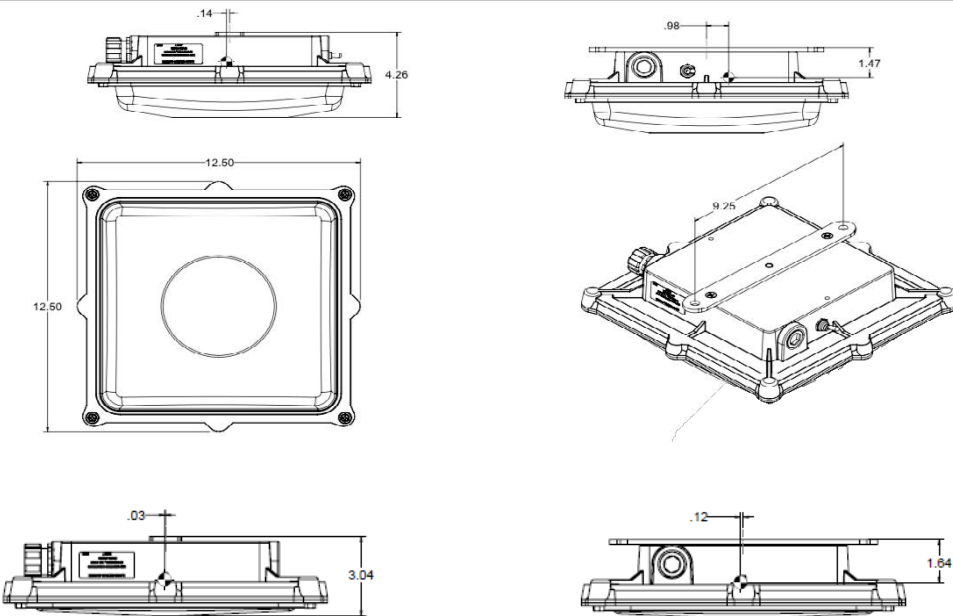

Flush/Flat Lens

