



LED LIGHTING SOLUTIONS

Precision Lighting for Naval Defense Platforms



LLS360 Overhead

Product Features

- 120/277VAC or 347/480VAC
- UL 1598
- UL 1598A
- UL8750
- UL 844 Class 1, Division 2 (A,B,C & D)
- ABS
- MIL-16377 Compliant
- IP66/67
- Emergency Battery Backup (4-6 Hour)
- 0-10V Dimming
- 8lbs (w/o Cable)
- A360 Die-Cast Aluminum Body
- Marine Grade Powder Coating
- Polycarbonate Lens
- Stainless Steel Hardware
- 3/4" Input Port
- Flush or Standard Configurations



©LEDLIGHTINGSOLUTIONS DIRECT.Info@1LLS.com OFFICE.855.309.1702 FAX.941.296.7313
WWW.LEDLIGHTINGSOLUTIONS.COM

All rights reserved. LED Lighting Solutions reserves the right to change specifications for product improvement without prior notice

Ordering Part Number

LLS360- 40

MILX1
Sym. 331.1 Alternative
MILX2
Sym. 77.4 Alternative
MILX3
Sym. 333.1 Alternative
MILX4
4,100 Lumens
MILX5
5,100 Lumens
MILX6
6,100 Lumens

8
Medium Lens
F
Flat Lens

SD
Standard Mount
FD
Flush Mount

0
No Cable
LST10
10' LSTHOF-3 Cable
LST15
15' LSTHOF-3 Cable
LSH10
10' LSFHOF-3 Cable
LSF10
15' LSFHOF-10'
7XW3
EM Cable

EM
Emergency
EM4
1000lm/4 Hour EM
EM6
6 Hour EM
EM6R
6 Hour EM Red
RE
Remote EM
*CW/GW
NVD Cyan (NV) White
RR
Red/Red
RW
Red/White
RW10
Red/White -10W Red
RW40
Red/White -40W Red

S
Switch
SS
Switched

AO
All one Bracket
TL
Task Lighting
C1D2
HAZLOC
DA
Dampa
DM
0-10V Dimming

*CW and GW are Interchangeable


Configuration Example

Part No. LLS360-MILX3-8-40-SD-LST15-S

Description : LLS360, MILX3, Medium Lens, 4100K, Standard Mount, 15' LSTHOF-3 Conductor, Switch

Any options not chosen can be left blank when building part number

Standard/Medium Lens

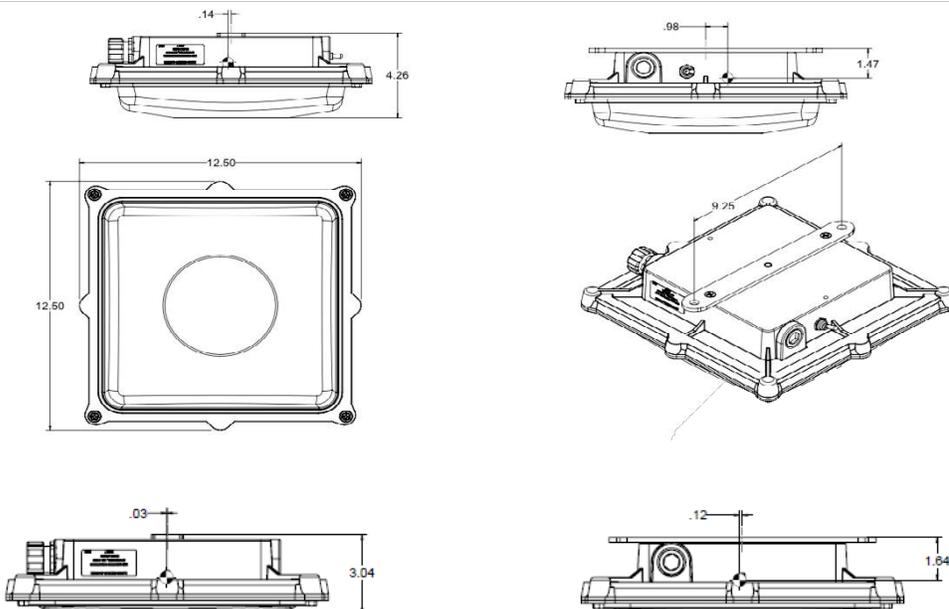

Flush/Flat Lens

