



LED LIGHTING SOLUTIONS

Precision Lighting for Naval Defense Platforms



SSL-M24 Double Low Voltage

Symbol 77.4, 344.2, 344.3, 77.5 Equivalent

Features

- Power: 20-30VDC (Double Array)
- Dual Shock Mounts
- Light weight, Under 8lbs
- Stainless Steel Fasteners
- Color Options: White, Red & NVD CYAN (NV)
- Battery Backup - 5 Hours
- Die Cast Aluminum Construction
- LSTHOF-3 and LSFHOF-3 Cable Available
- 7XW-3 EM Cable
- White Diffusing Lens
- Marine Grade White Powder Coating Finish
- MIL-DTL16377 Compliant



Ordering Part Number

SSL-M242VDC

77.4	S	WH	S	0
77.5	Standard Mount	White	DPST Switch	No Cable
*77.4EM	F	BL	SS	LST10
*77.5EM	Flush Mount	Blue	Two DPST Switches	10' LSTHOF-3 Cable
**344.2		RD		LST15
**344.3		NV		15' LSTHOF-3 Cable
		Night Vision		LSF10
				10' LSFHOF-3 Cable
				LSF15
				15' LSFHOF-3 Cable
				7XW3
				EM Cable
				DM
				0-10V Dimming




*EM units will be provided with 7XW-3 Cable.

**Symbols 344.2 and 344.3 refer to prismatic lens fixtures, which are no longer necessary due to LED technology. Orders placed for either symbol will be shipped with our diffused lens

Part No. SSL-M242VDC-77.4-S-WH-S-LST10

Description LED 2', Double, 24VDC, 77.4, Standard Mount, White (4100K), DPST Switch, 10' LSTHOF-3 Cable

Symbol 77.4/344.2

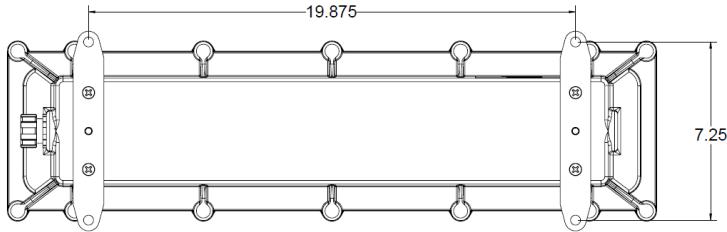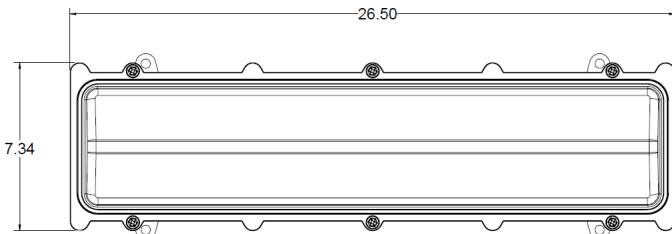

Symbol 77.5/344.3

