



LED LIGHTING SOLUTIONS

Precision Lighting for Naval Defense Platforms



SSL-855 Mirror Fixture Low Voltage

Product Features

- Power: 20-30VDC
- 0-10V Dimming
- 20 Watts
- 4100K
- 21" and 24" Available
- Single or Dual Receptacle
- DSPT Switch Available
- Diffusing Acrylic Lens (Polycarbonate Available)
- 10' 7XW3-Cable
- **Body:** Polyester powder-coated after phosphate
- pretreatment for superior adhesion and corrosion resistance
- **Door:** One piece, die-formed cold rolled steel door with
- 14 gauge lens retainers and a full length welded pin piano hinge
- Integral single, three-pole, two-wire (third pole ground) receptacle.
- MIL-DTL16377 Compliant



Ordering Part Number

SSL-855VDC

120

21
21" Length
24
24" Length

1
Single Recpt.
2
Dual Recpt.

3
No Switch
4
Switch

0
No Cable
10
10' LSTHOF-3 Cable
DM
0-10V Dimming


- Switch is not provided with dual receptacle option.
- When ordering a single receptacle unit, switch will be installed.
- SSL-855 Mirror Light meets MIL-DTL-16377/58 Specifications.

Configuration Example

Part No. SSL-855VDC-21-1-4-120-10

Description LED Mirror Light, 20-30VDC, 21", Single Receptacle, DPST Switch, 10' LSTHOF-3 Cable

Dimensions

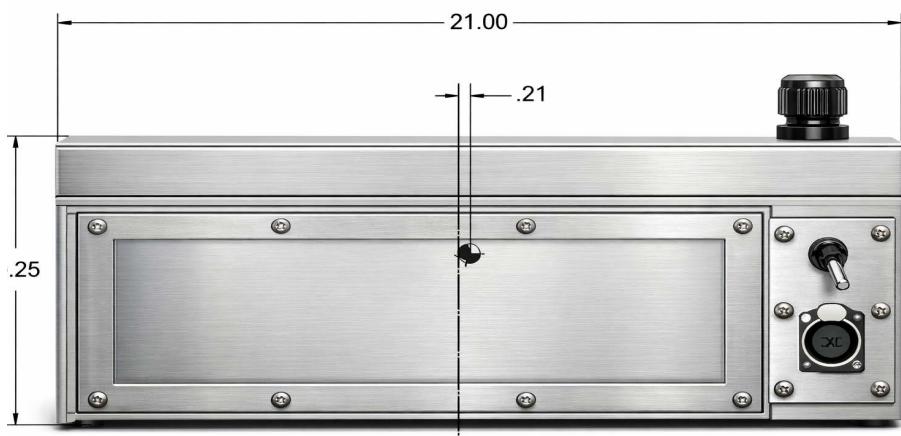

24" Dimensions Not Shown

