
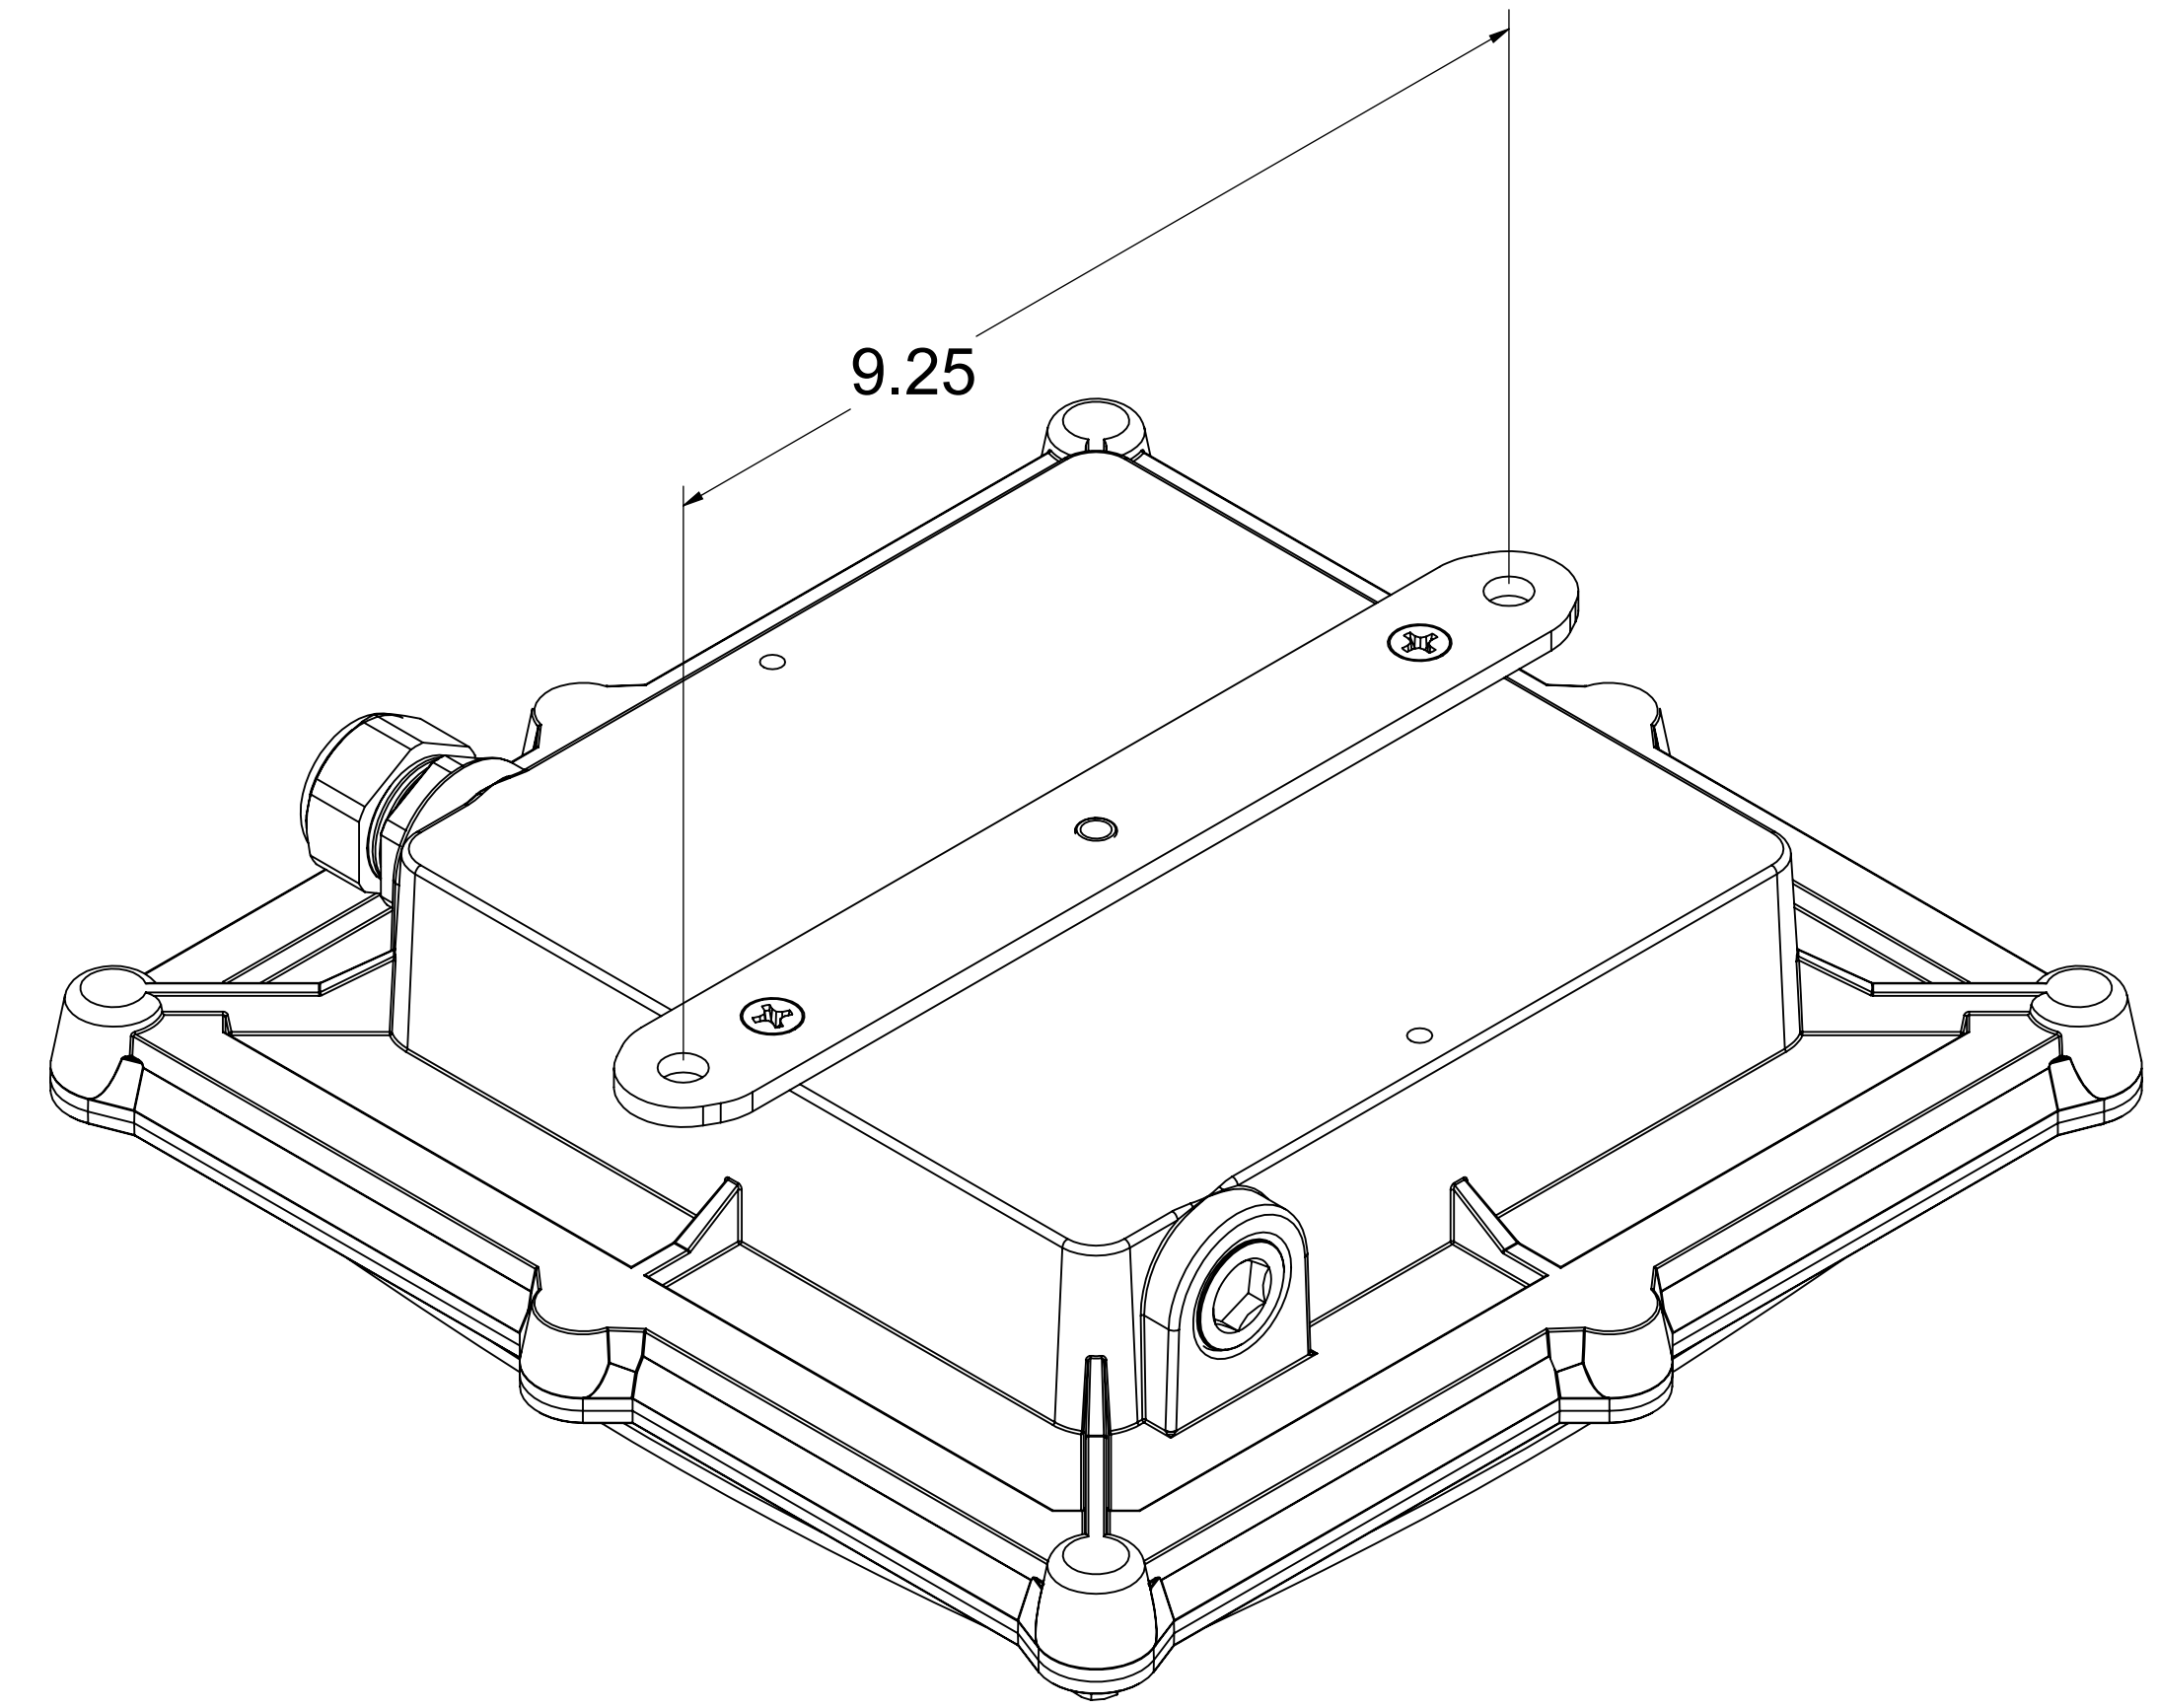
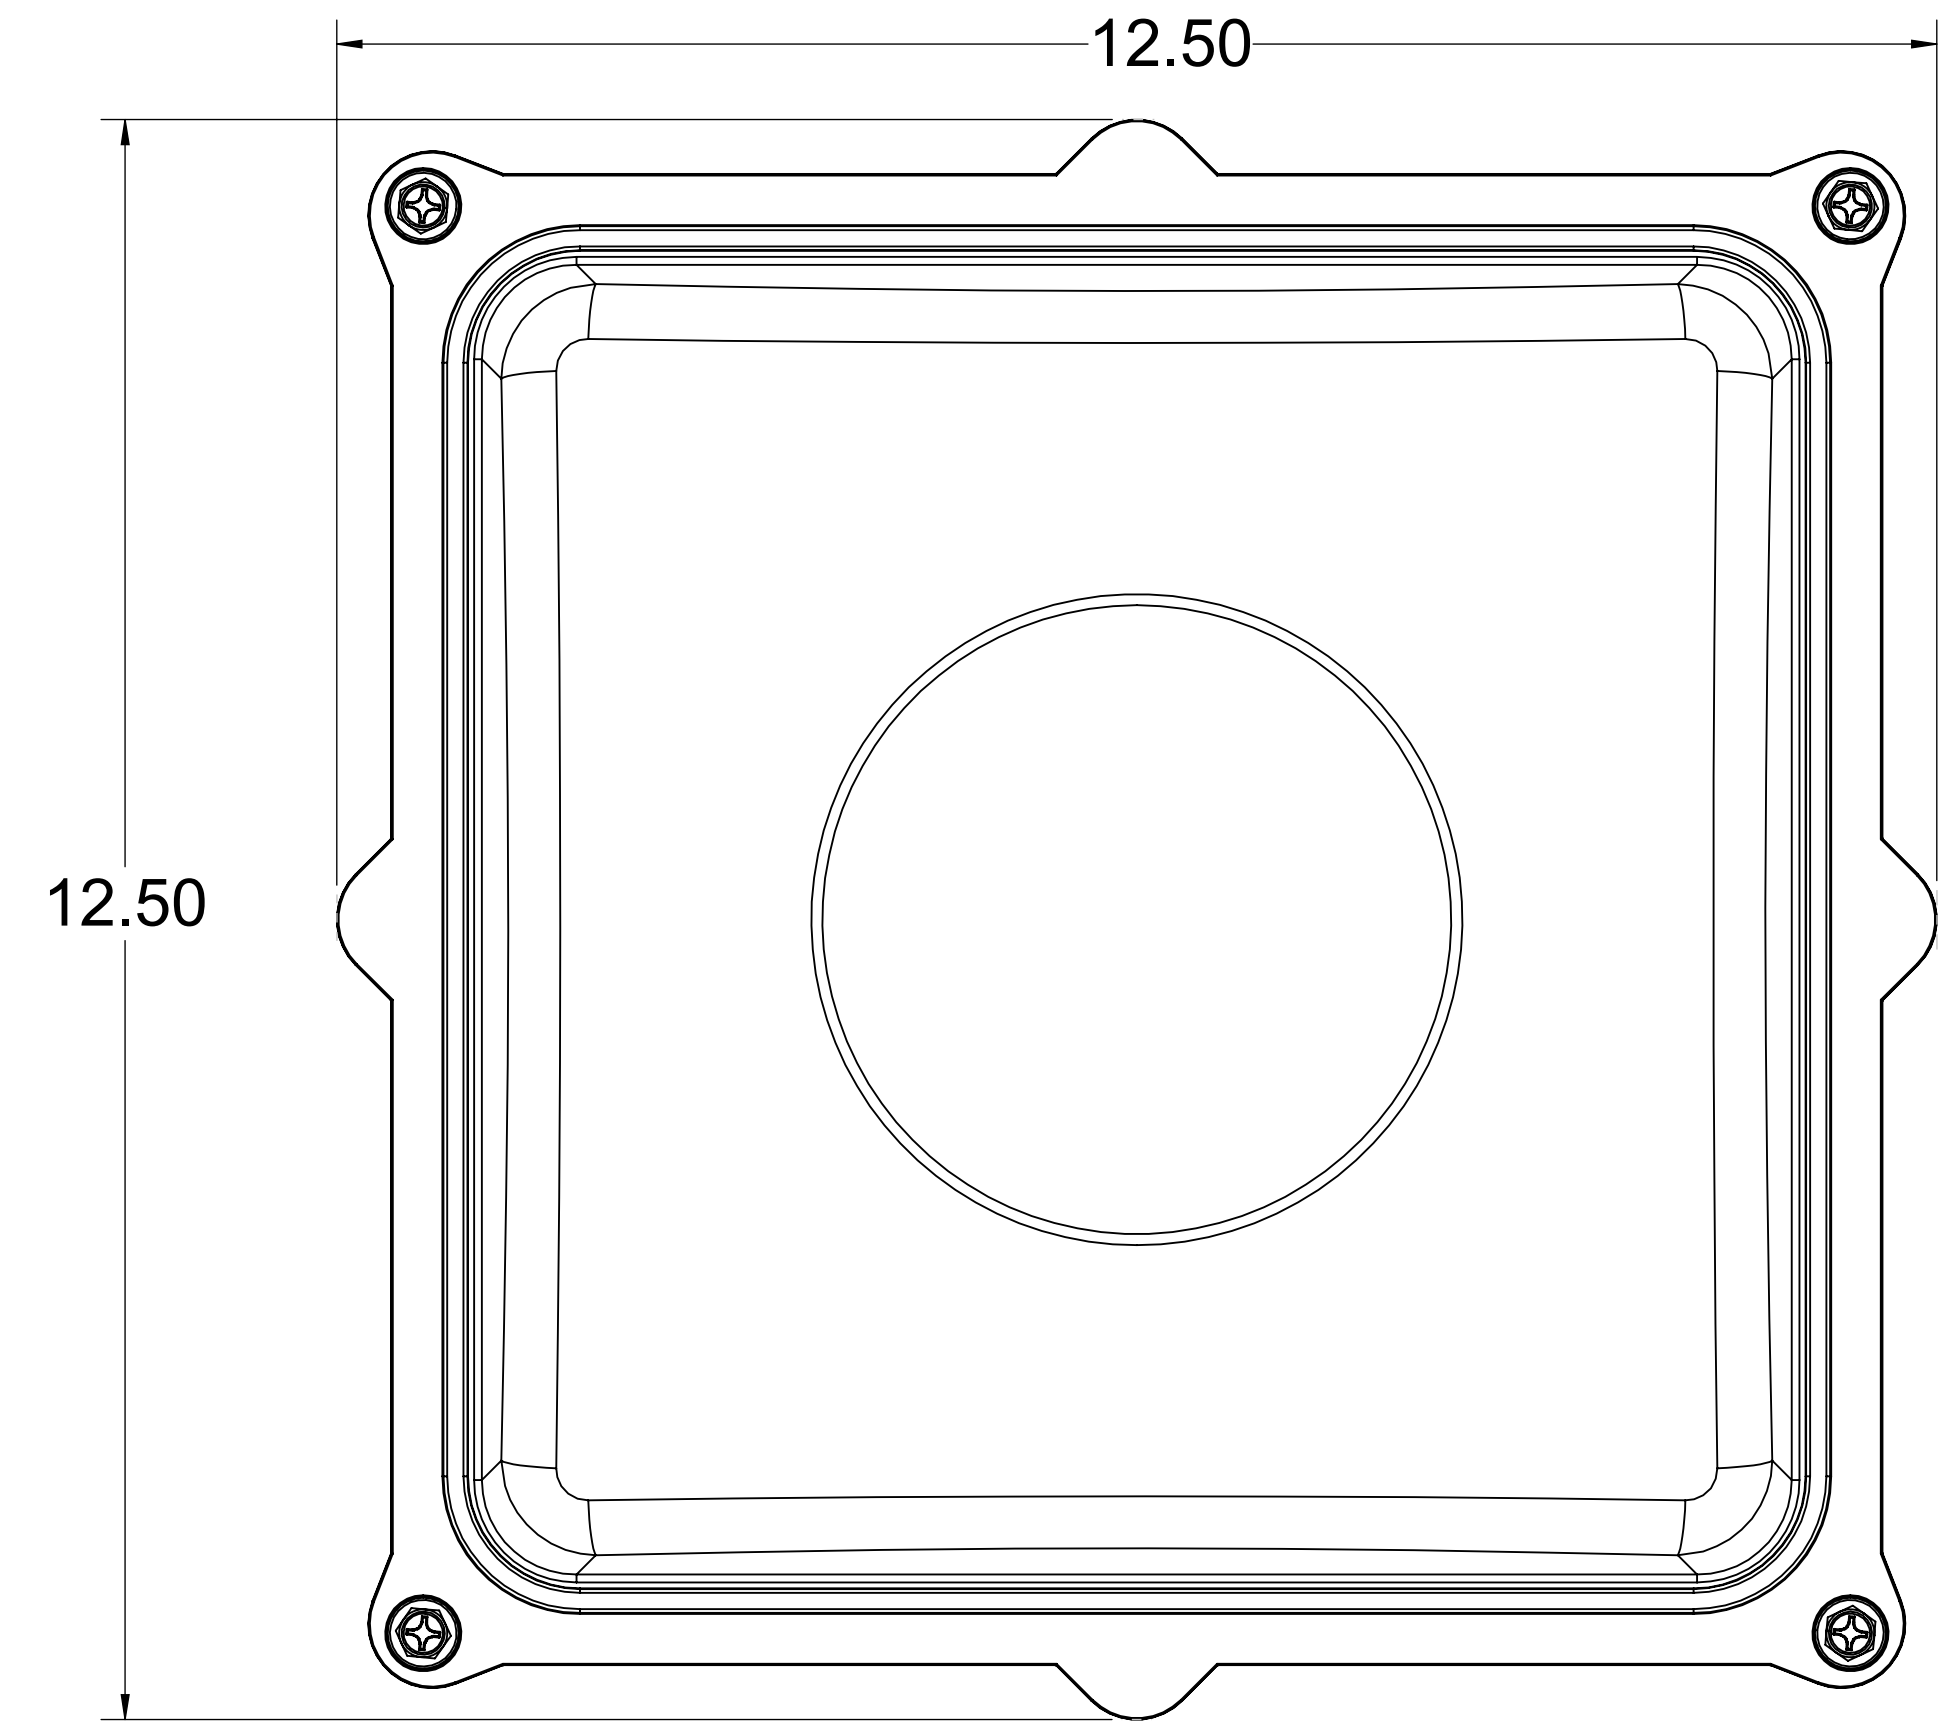
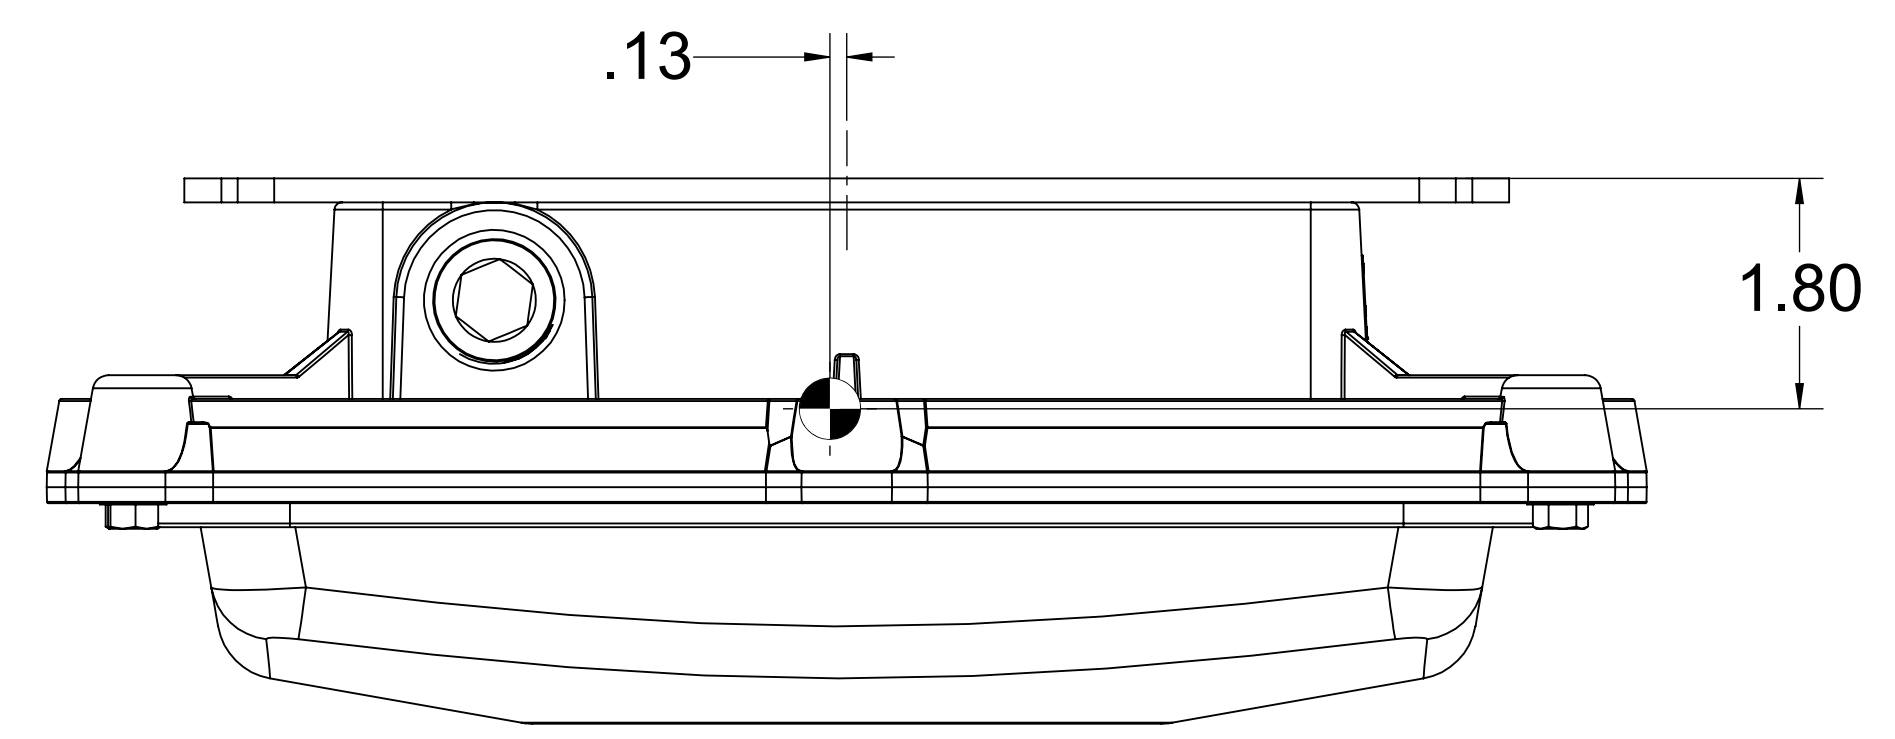


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
ALL	A	INITIAL RELEASE OF LLS360 GENERATION 2	9/5/24	9/5/24

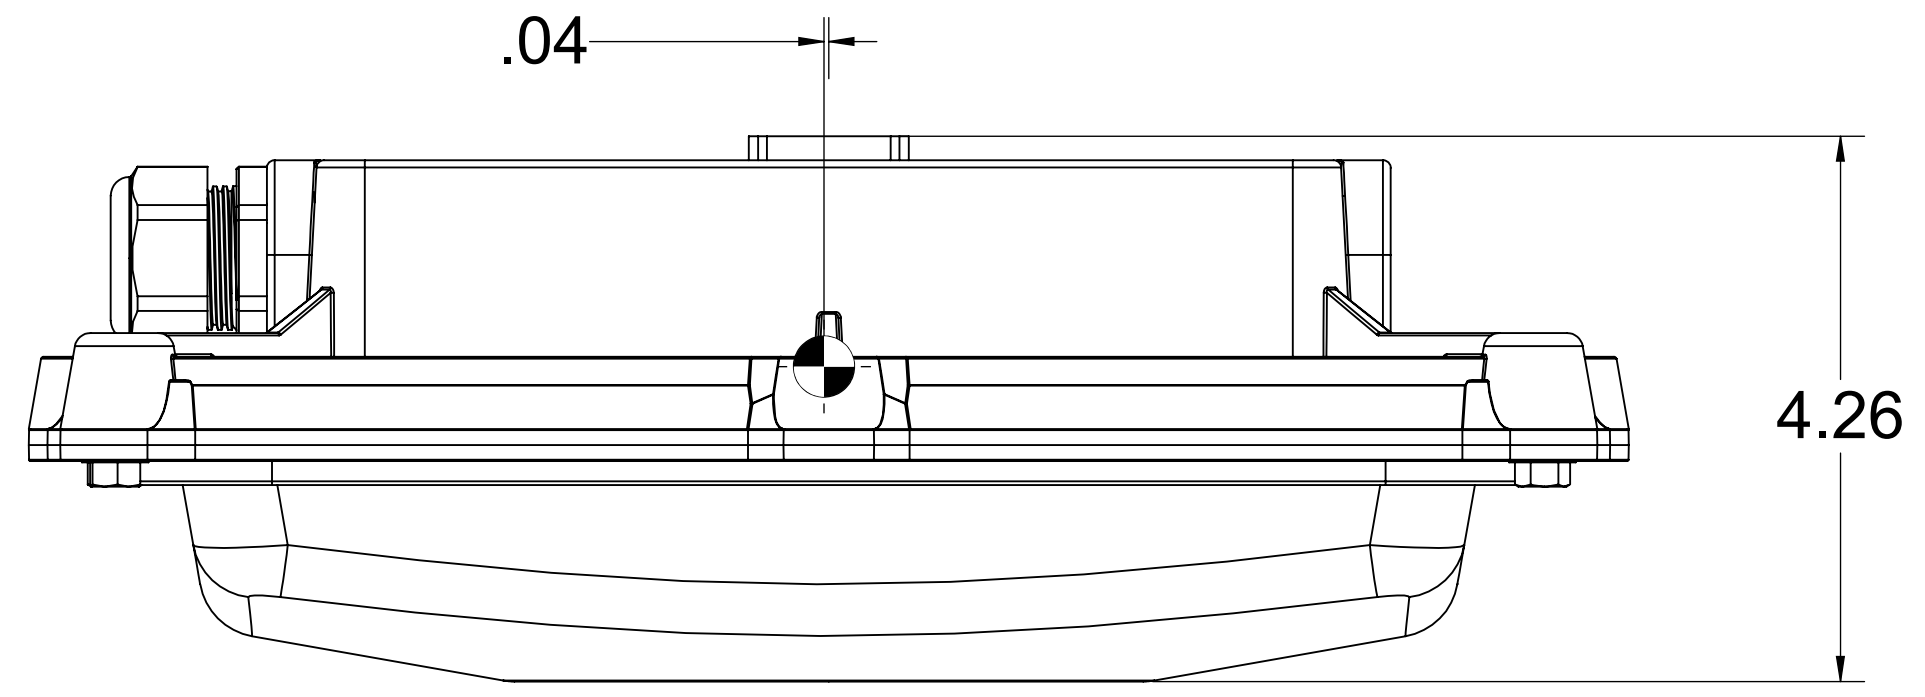





LLS MODEL NUMBER	DESCRIPTION	NSN
LLS360-MILX1-8-40-SD	LIGHT, SSL10W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, WHITE	
LLS360-MILX2-8-40-SD	LIGHT, SSL20W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, WHITE	
LLS360-MILX3-8-40-SD	LIGHT, SSL30W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, WHITE	
LLS360-MILX1-8-40-SD-RW	LIGHT, SSL10W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, RED/WHITE	
LLS360-MILX2-8-40-SD-RW	LIGHT, SSL20W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, RED/WHITE	
LLS360-MILX3-8-40-SD-RW	LIGHT, SSL30W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, RED/WHITE	
LLS360-MILX3-8-40-SD-RW10	LIGHT, SSL30W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, 10W RED/WHITE	
LLS360-MILX1-8-40-SD-CW	LIGHT, SSL10W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, CYAN/WHITE	
LLS360-MILX2-8-40-SD-CW	LIGHT, SSL20W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, CYAN/WHITE	
LLS360-MILX3-8-40-SD-CW	LIGHT, SSL30W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, CYAN/WHITE	
LLS360-MILX3-8-40-SD-RR	LIGHT, SSL15W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, ALL RED	

FIXTURE WEIGHT (W/OUT CABLE) = 6 lbs - 6oz
115VAC, 60Hz, INPUT
10 - 30WATT, WHITE LIGHT OUTPUT
5-10 WATT, COLORED LIGHT OUTPUT
NON-EMERGENCY BACKUP TYPE

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR ± .05DG TWO PLACE DECIMAL ±0.01 THREE PLACE DECIMAL ±0.005		NAME DARRELL P.	DATE 9/5/24
<small> PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF [INSERT COMPANY NAME HERE]. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF [INSERT COMPANY NAME HERE] IS PROHIBITED. </small>	MATERIAL DIECAST ALUMINUM	CHECKED DARRELL P.	REV A
	FINISH POWDERCOAT	ENG APPR. DARRELL P.	
	DO NOT SCALE DRAWING	MFG APPR. DARRELL P.	

LLS360, GEN2, STANDARD MNT, NON-EM
 D LLS360-MILX-8-40-SD-XX
 SCALE: 2:3 CAGE CODE: 6Q972 SHEET 1 OF 2

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
ALL	A	INITIAL RELEASE OF LLS360 GENERATION 2	9/5/24	9/5/24
PAGE 2	A1	FIXED NUMBERING	1/16/26	1/16/26

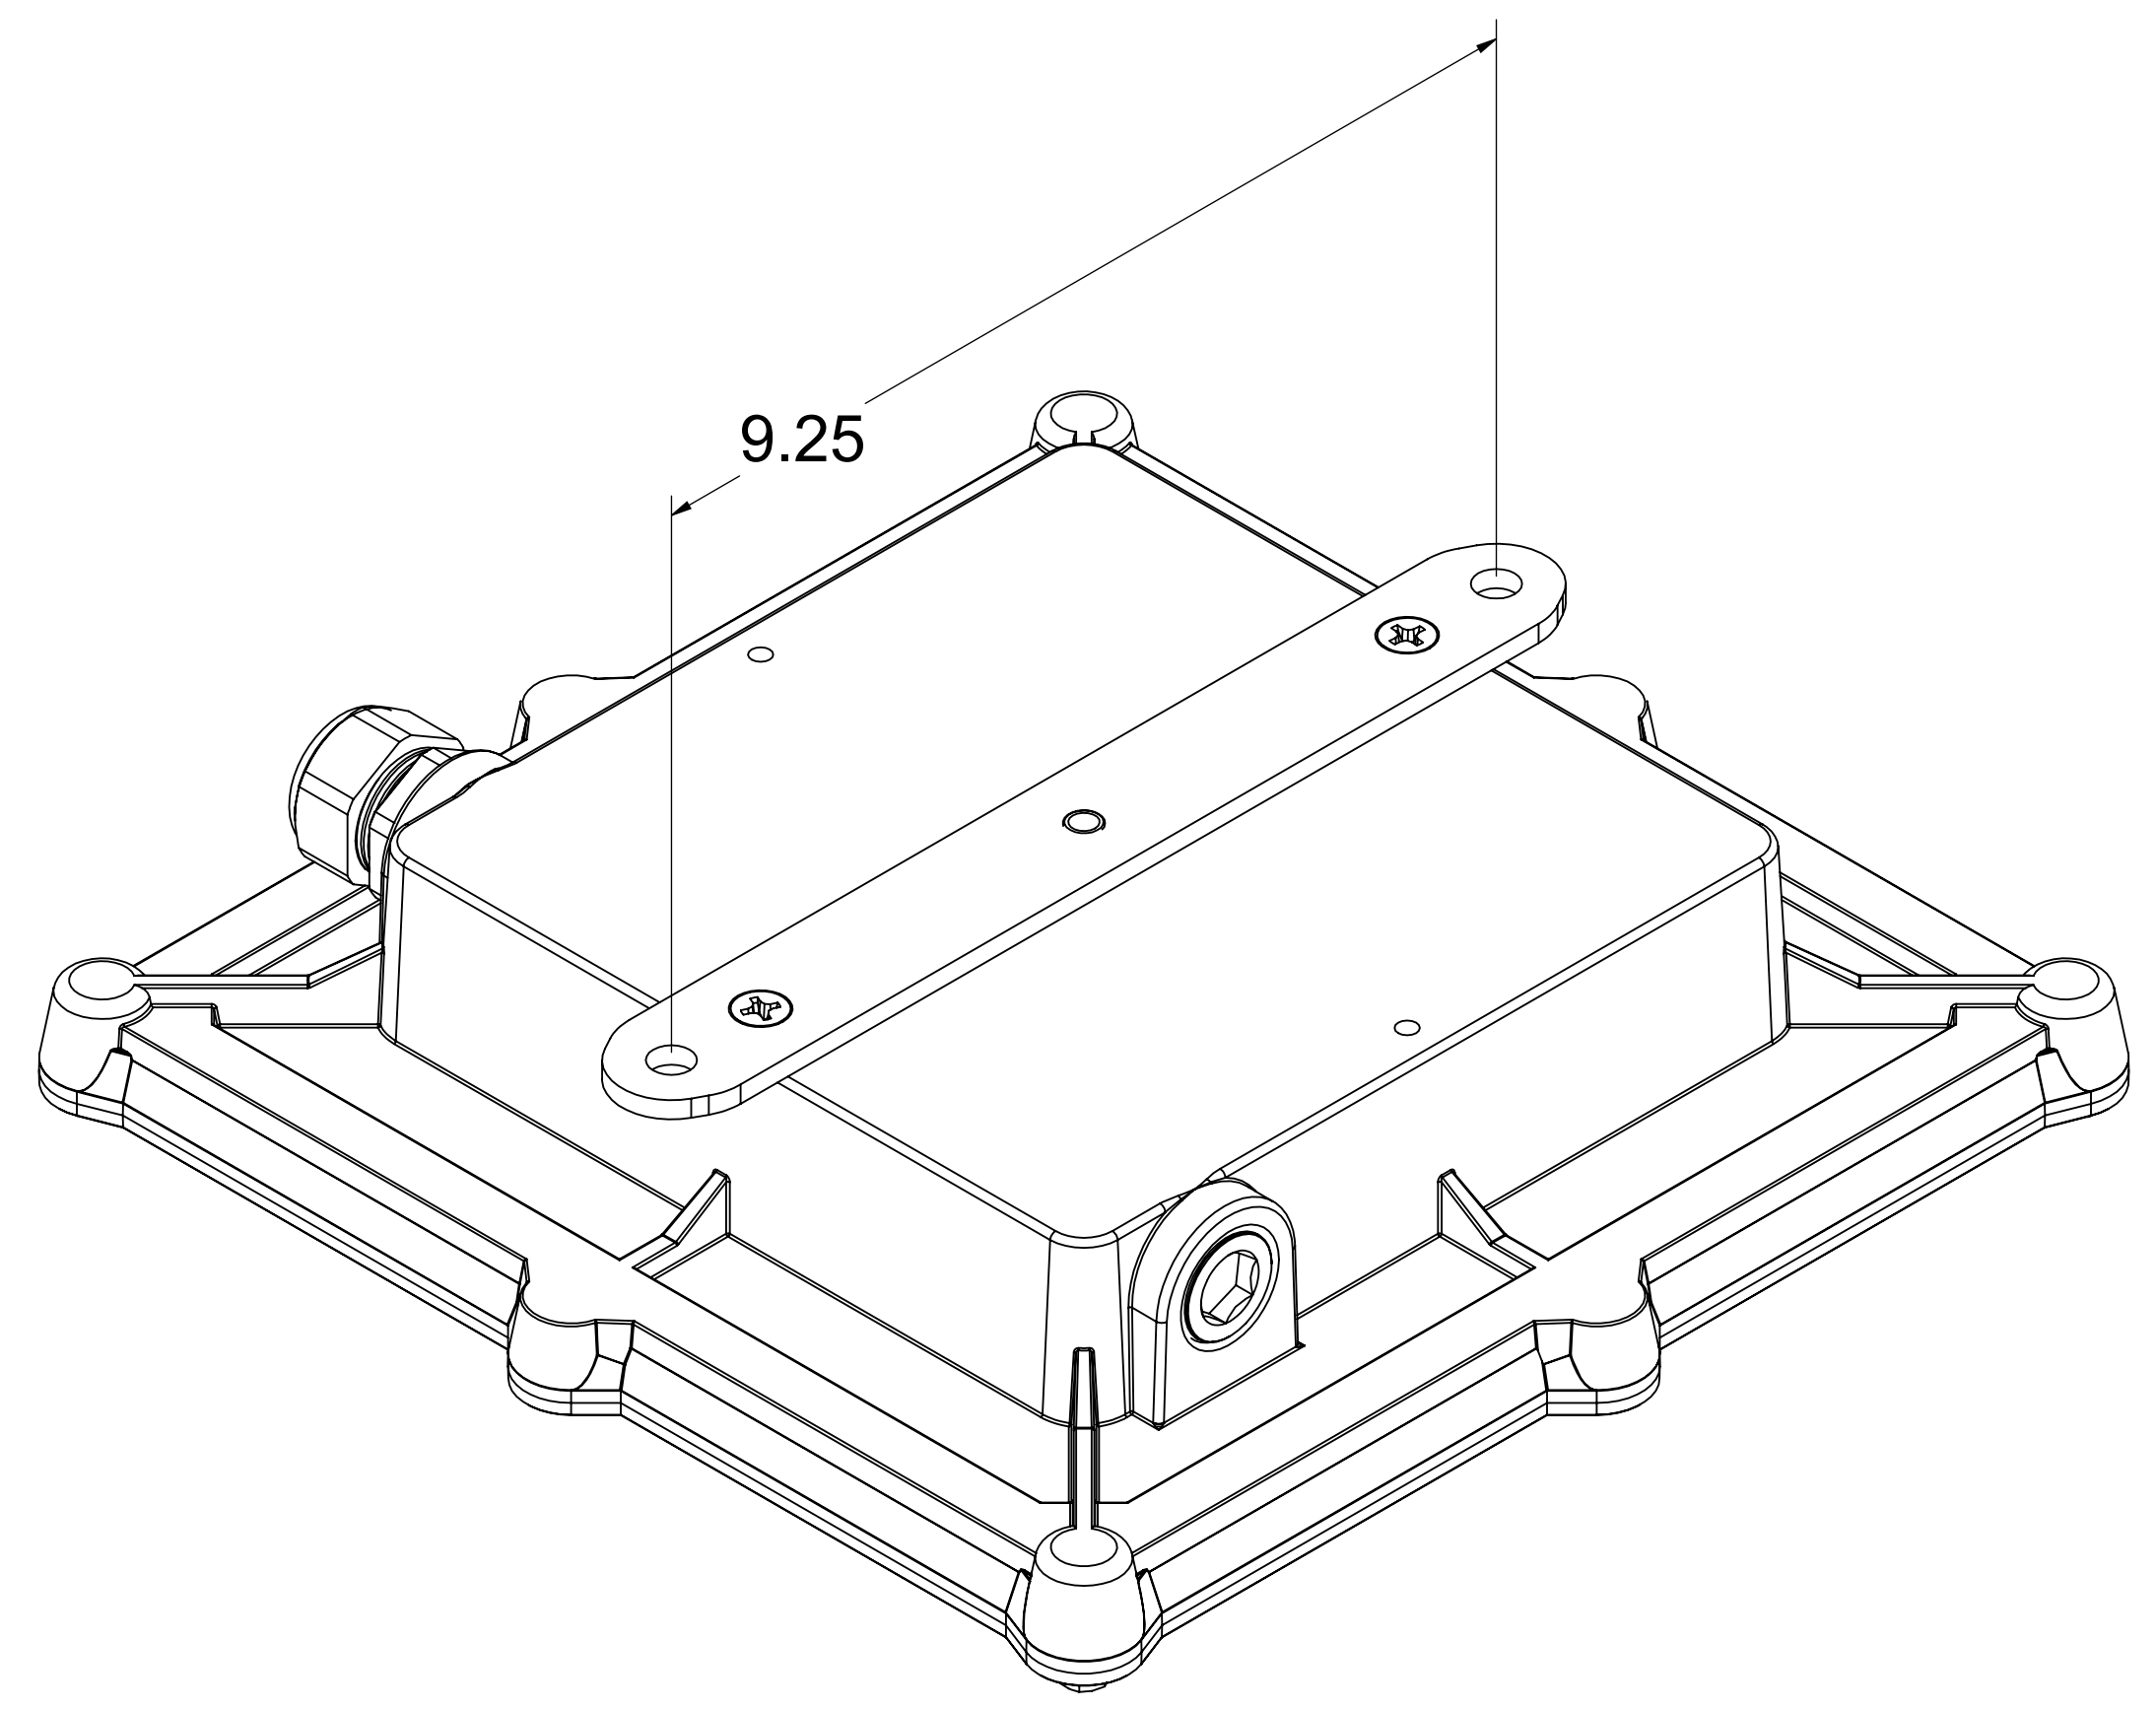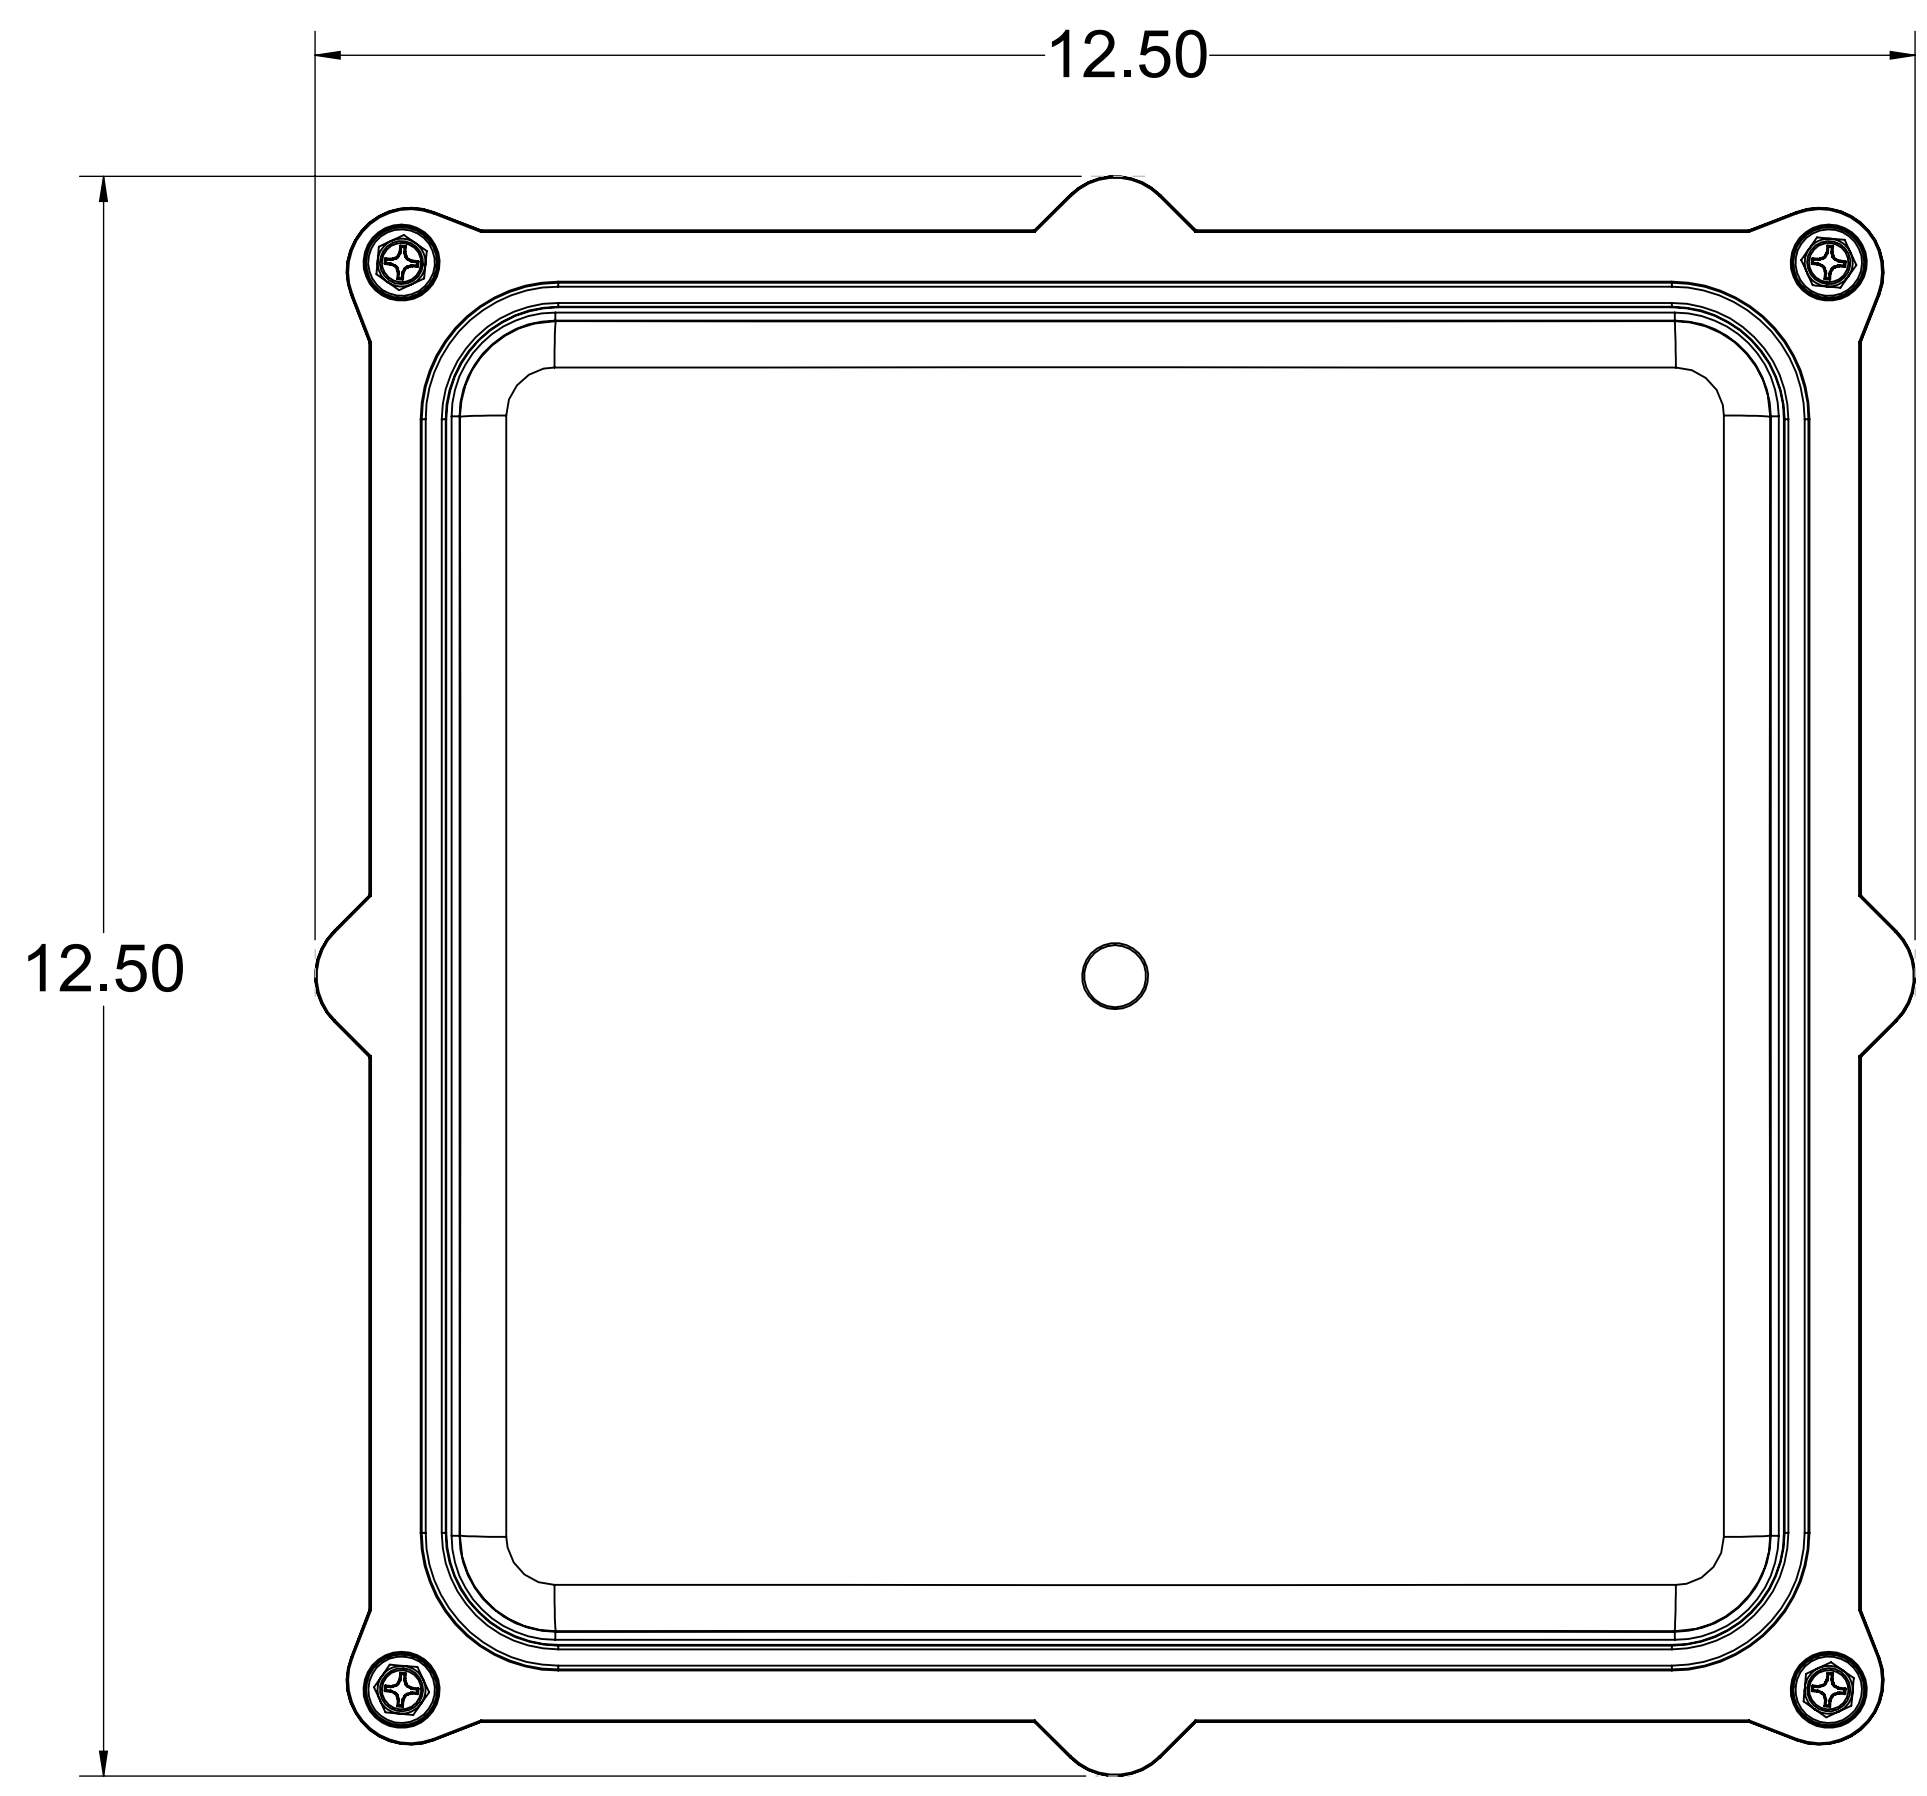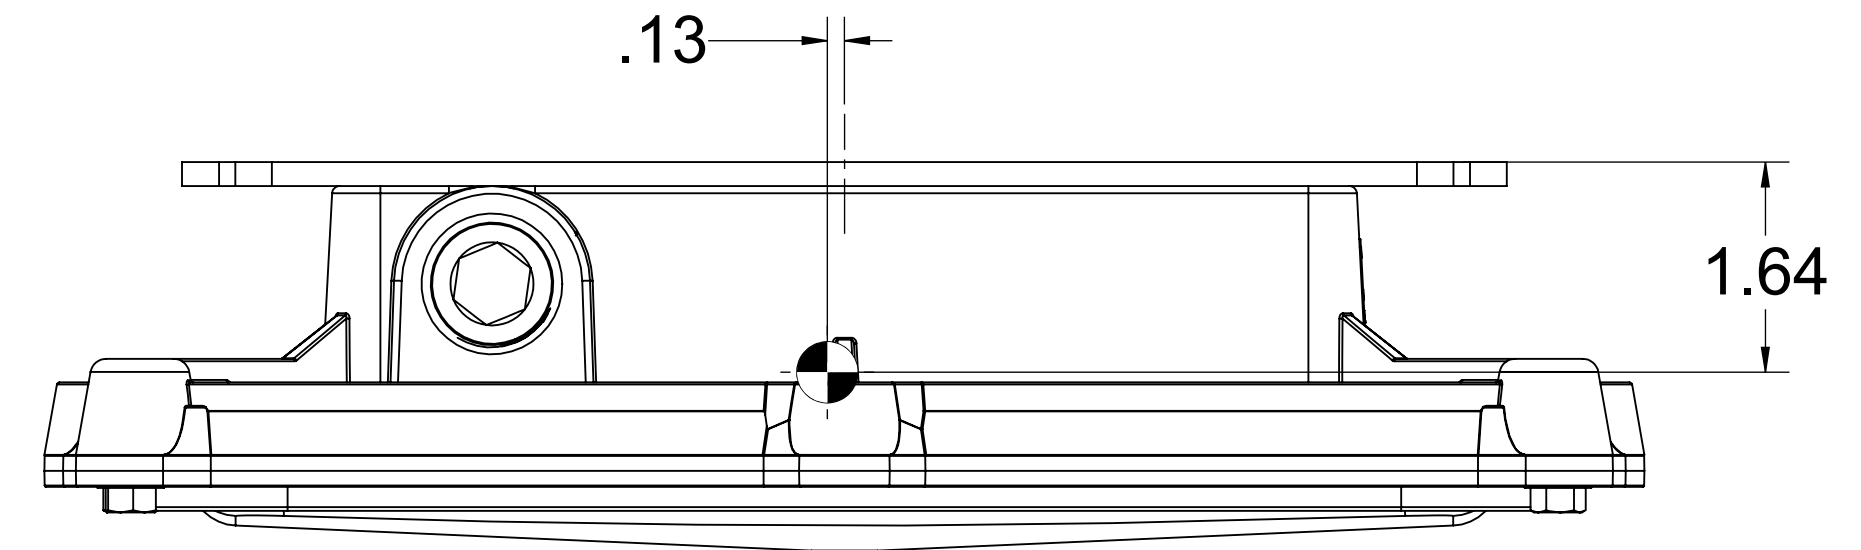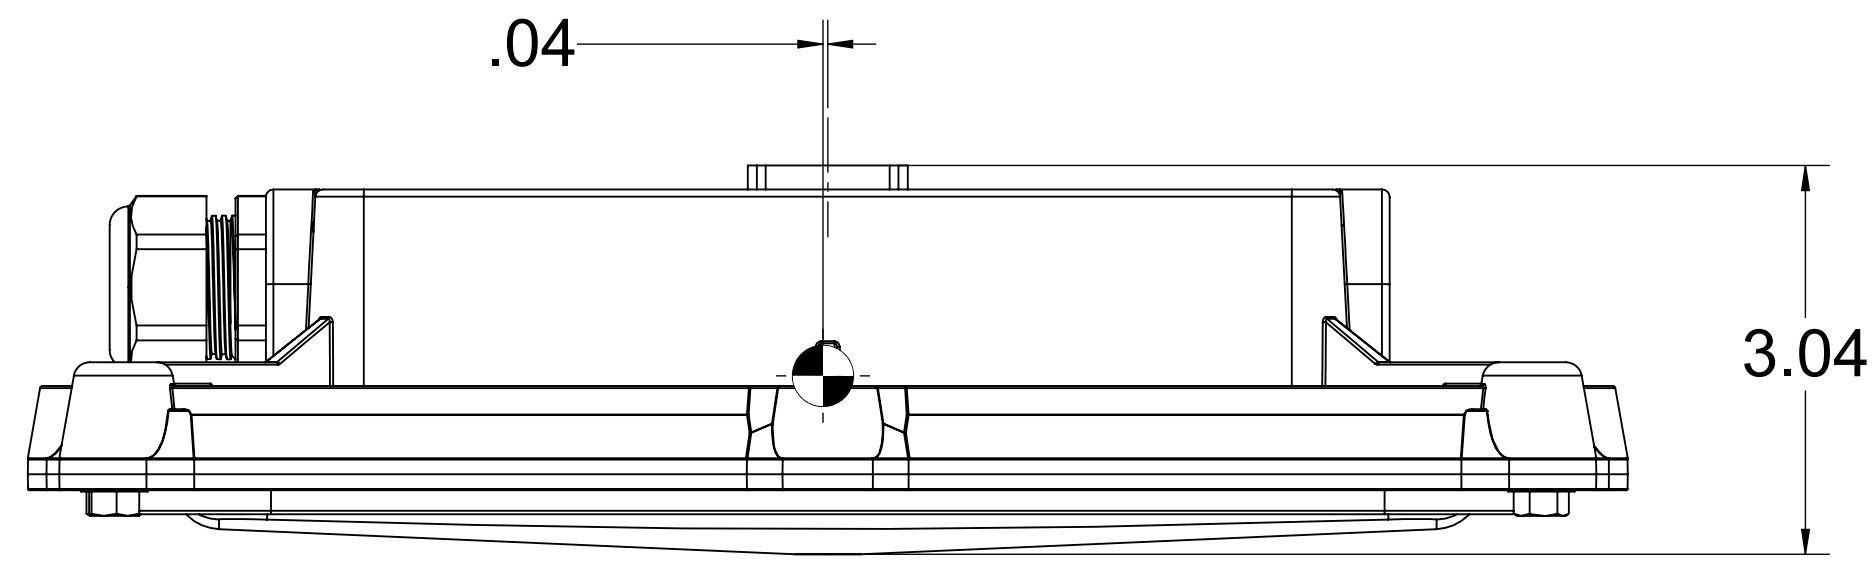

FIXTURE WEIGHT (W/OUT CABLE) = 6 lbs - 6oz
115VAC, 60Hz, INPUT
10 - 30WATT, WHITE LIGHT OUTPUT
5 WATT, COLORED LIGHT OUTPUT
NON-EMERGENCY BACKUP TYPE

LLS MODEL NUMBER	DESCRIPTION	NSN
LLS360-MILX1-F-40-SD	LIGHT, SSL10W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, WHITE, FLAT LENS	
LLS360-MILX2-F-40-SD	LIGHT, SSL20W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, WHITE, FLAT LENS	
LLS360-MILX3-F-40-SD	LIGHT, SSL30W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, WHITE, FLAT LENS	
LLS360-MILX1-F-40-SD-RW	LIGHT, SSL10W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, RED/WHITE, FLAT LENS	
LLS360-MILX2-F-40-SD-RW	LIGHT, SSL20W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, RED/WHITE, FLAT LENS	
LLS360-MILX3-F-40-SD-RW	LIGHT, SSL30W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, RED/WHITE, FLAT LENS	
LLS360-MILX1-F-40-SD-CW	LIGHT, SSL10W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, CYAN/WHITE, FLAT LENS	
LLS360-MILX2-F-40-SD-CW	LIGHT, SSL20W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, CYAN/WHITE, FLAT LENS	
LLS360-MILX3-F-40-SD-CW	LIGHT, SSL30W, 120VAC, STANDARD MOUNT, NON-EMERGENCY, CYAN/WHITE, FLAT LENS	




UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES:
 ANGULAR: ± 1 DEG
 TWO PLACE DECIMAL ±0.01
 THREE PLACE DECIMAL ±0.005

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF [INSERT COMPANY NAME HERE]. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF [INSERT COMPANY NAME HERE] IS PROHIBITED.

MATERIAL: DIECAST ALUMINUM	CHECKED: DARRELL P.	NAME: DARRELL P.	DATE: 9/5/24
FINISH: POWDERCOAT	ENG APPR: DARRELL P.	SCALE: 2:3	
DO NOT SCALE DRAWING	MFG APPR: DARRELL P.		

LLS360, GEN2, STANDARD MNT, NON-EM, FLAT LENS
 SIZE: D DWG. NO.: LLS360-MILXX-F-40-SD-XX REV: A
 SCALE: 2:3 CAGE CODE: 6Q972 SHEET 1 OF 2

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
ALL	A	INITIAL RELEASE LLS360 GENERATION 2	9/6/24	9/6/24

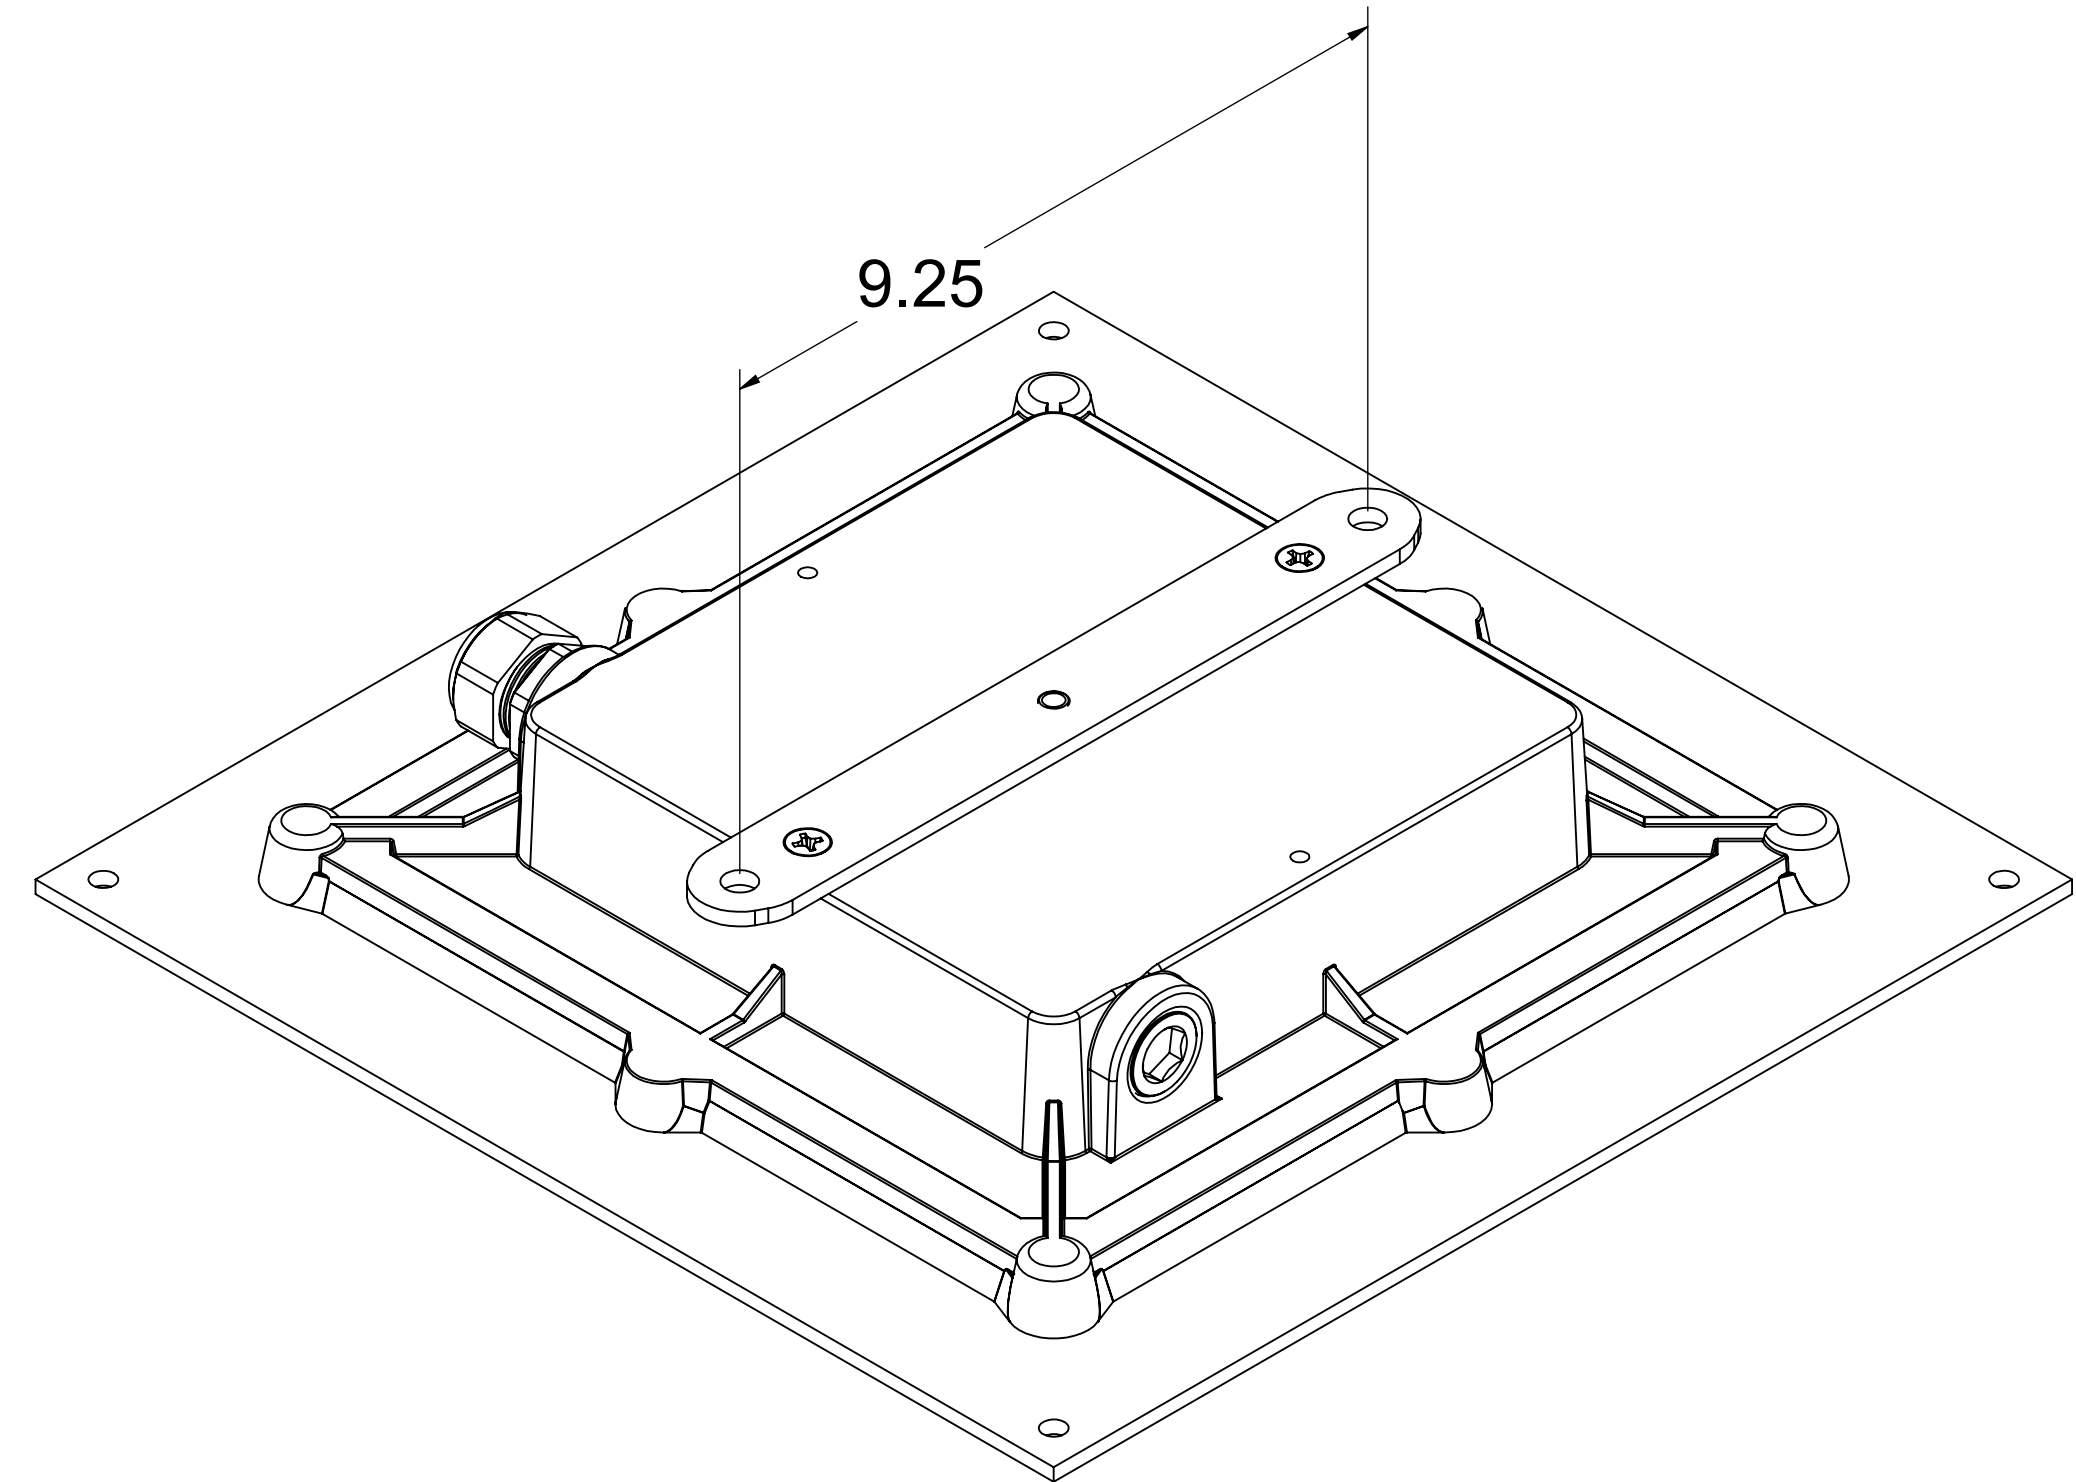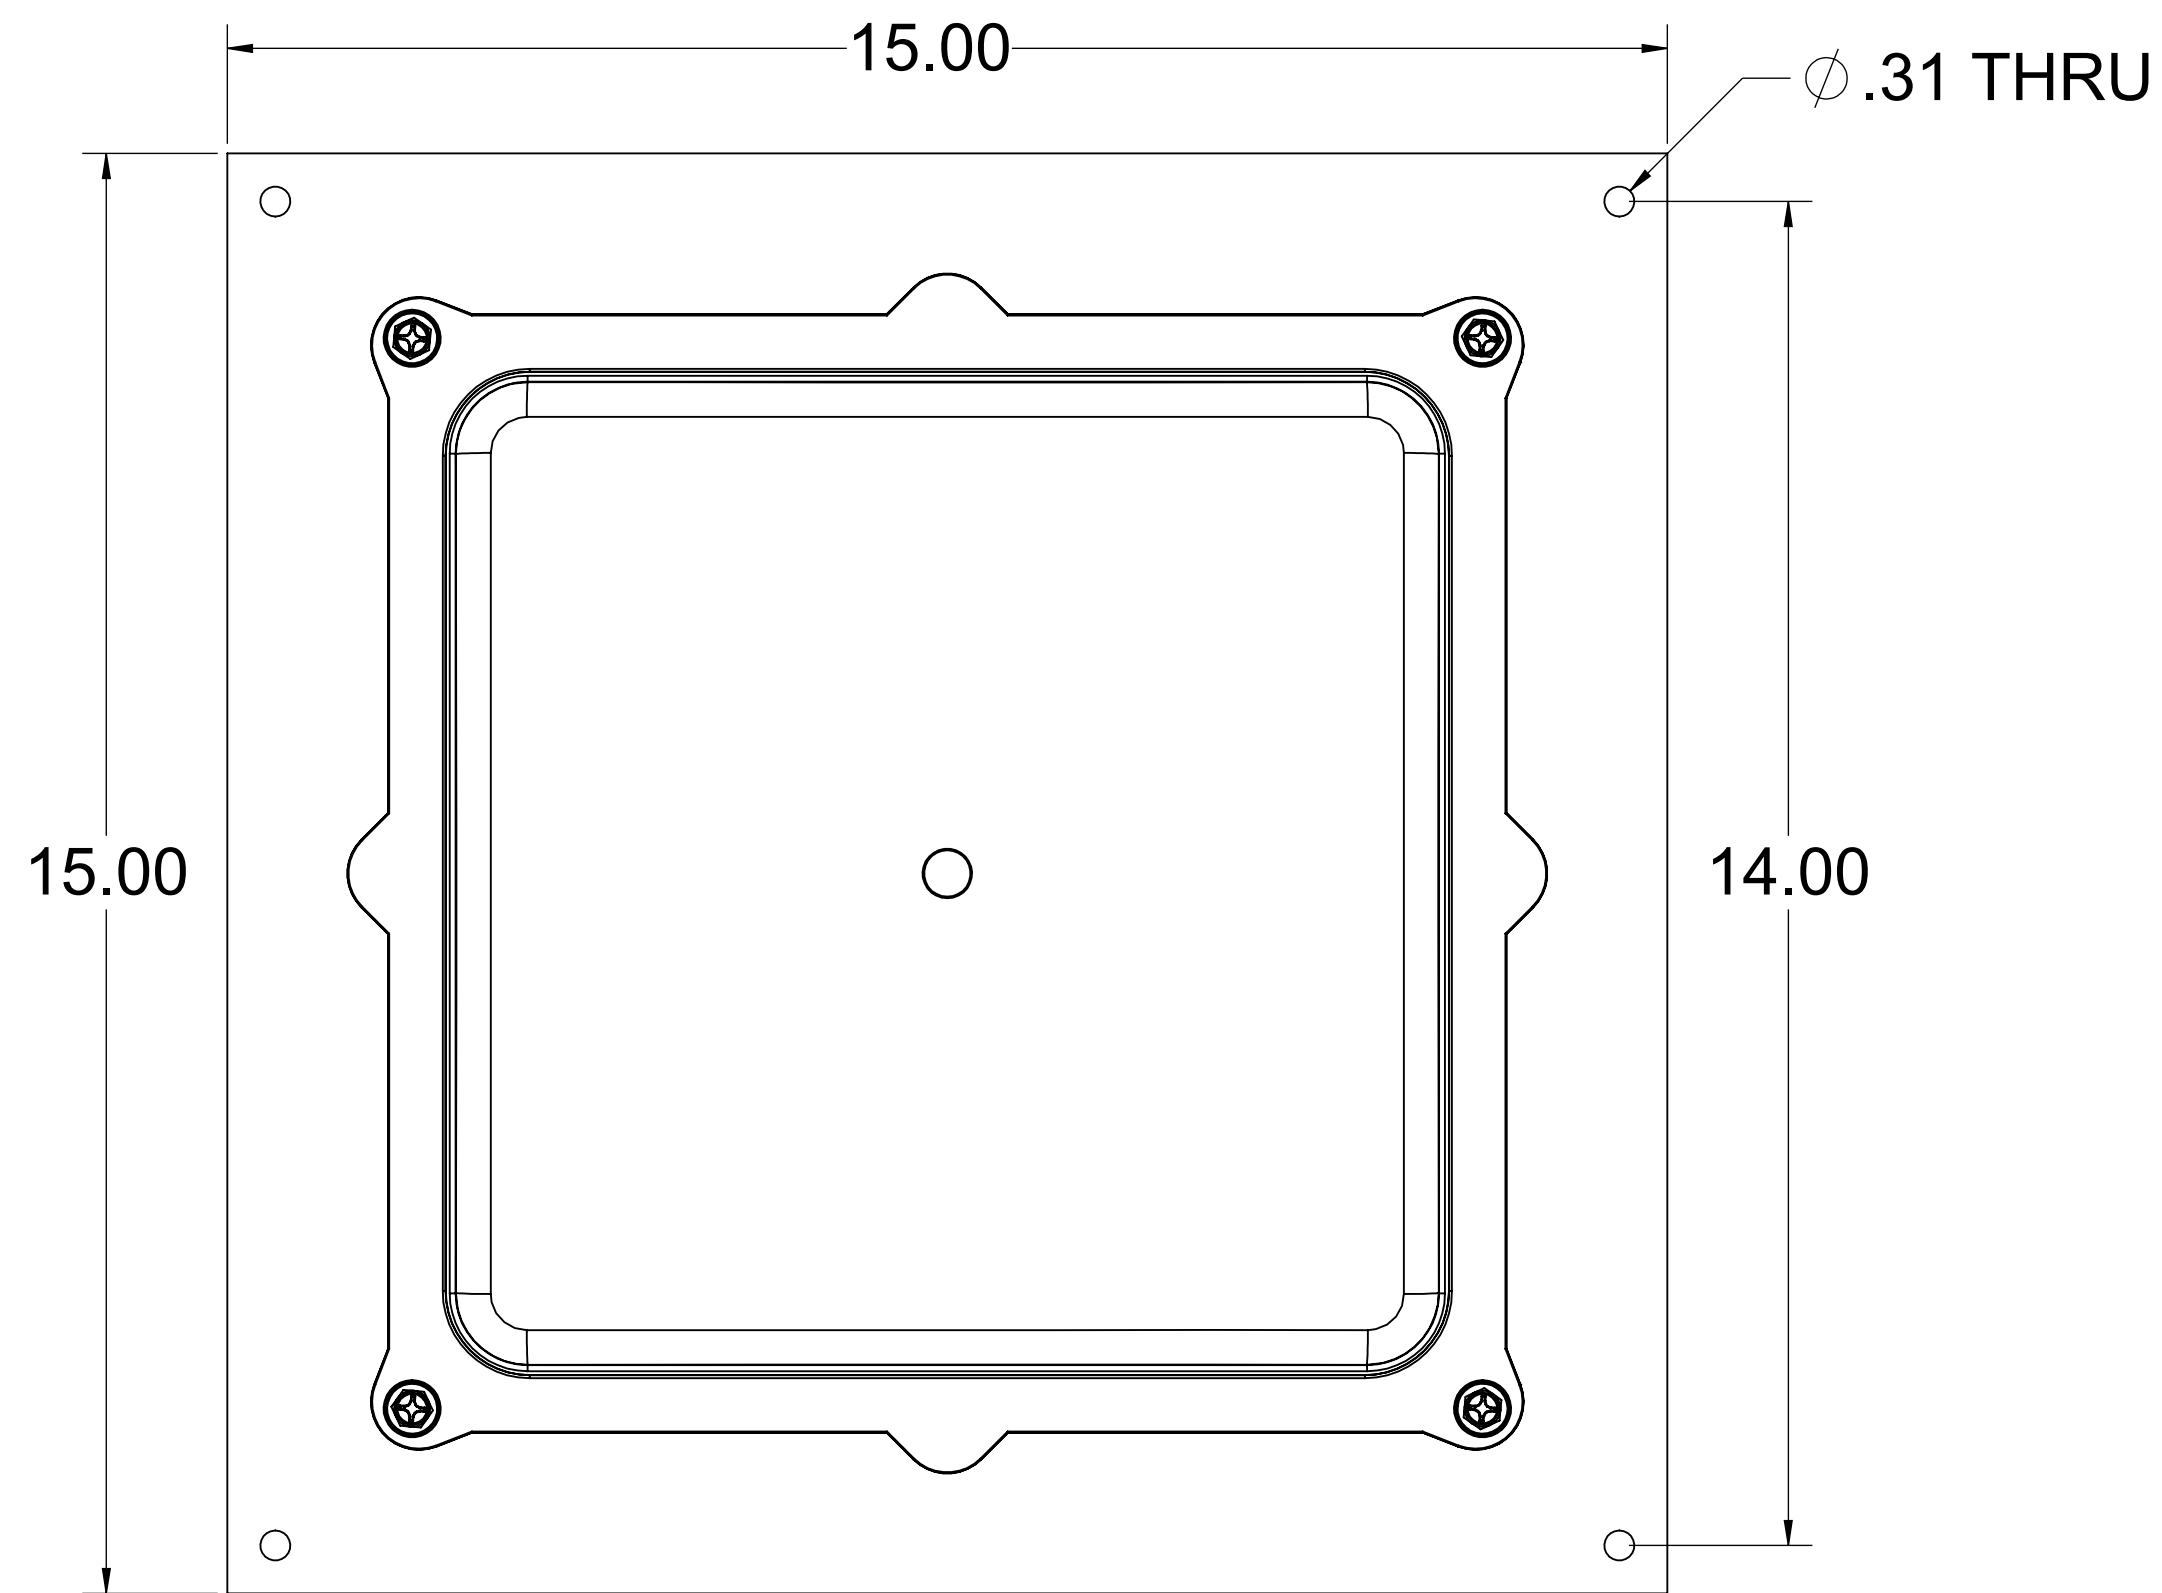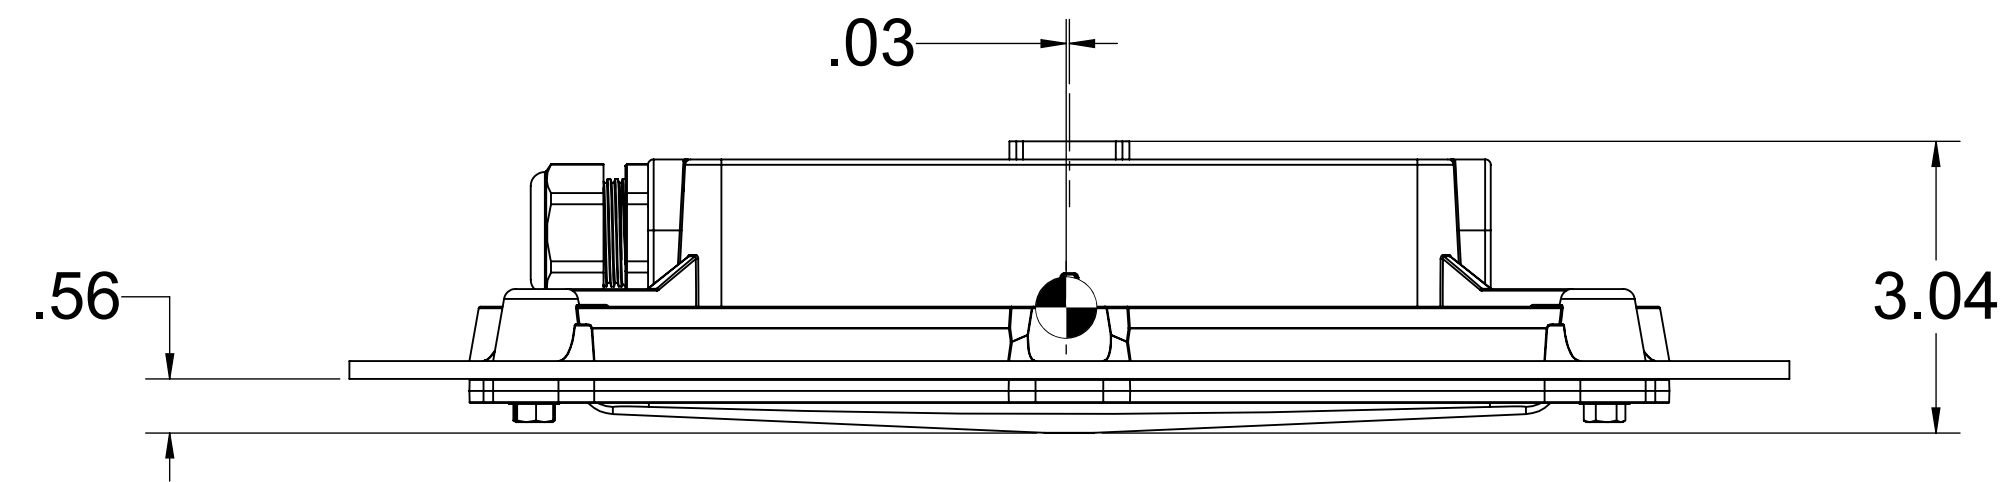

FIXTURE WEIGHT (W/OUT CABLE) = 8 lbs - 7oz
115VAC, 60Hz, INPUT
10 - 30WATT, WHITE LIGHT OUTPUT
5-10 WATT COLORED LIGHT OUTPUT
NON-EMERGENCY BACKUP TYPE

LLS MODEL NUMBER	DESCRIPTION	NSN
LLS360-MILX1-8-40-FD	LIGHT, SSL10W, 120VAC, FLUSH MOUNT, NON-EMERGENCY, WHITE	
LLS360-MILX2-8-40-FD	LIGHT, SSL20W, 120VAC, FLUSH MOUNT, NON-EMERGENCY, WHITE	
LLS360-MILX3-8-40-FD	LIGHT, SSL30W, 120VAC, FLUSH MOUNT, NON-EMERGENCY, WHITE	
LLS360-MILX3-F-40-FD	LIGHT, SSL30W, 120VAC, FLUSH MOUNT, NON-EMERGENCY, WHITE	
LLS360-MILX1-8-40-FD-RW	LIGHT, SSL10W, 120VAC, FLUSH MOUNT, NON-EMERGENCY, RED/WHITE	
LLS360-MILX2-8-40-FD-RW	LIGHT, SSL20W, 120VAC, FLUSH MOUNT, NON-EMERGENCY, RED/WHITE	
LLS360-MILX3-8-40-FD-RW	LIGHT, SSL30W, 120VAC, FLUSH MOUNT, NON-EMERGENCY, RED/WHITE	
LLS360-MILX1-8-40-FD-RW10	LIGHT, SSL10W, 120VAC, FLUSH MOUNT, NON-EMERGENCY, 10W RED/WHITE	
LLS360-MILX2-8-40-FD-RW10	LIGHT, SSL20W, 120VAC, FLUSH MOUNT, NON-EMERGENCY, 10W RED/WHITE	
LLS360-MILX3-8-40-FD-RW10	LIGHT, SSL30W, 120VAC, FLUSH MOUNT, NON-EMERGENCY, 10W RED/WHITE	
LLS360-MILX3-F-40-FD-RR	LIGHT, SSL15W, 120VAC, FLUSH MOUNT, NON-EMERGENCY, ALL RED	
LLS360-MILX1-8-40-FD-CW	LIGHT, SSL10W, 120VAC, FLUSH MOUNT, NON-EMERGENCY, CYAN/WHITE	
LLS360-MILX2-8-40-FD-CW	LIGHT, SSL20W, 120VAC, FLUSH MOUNT, NON-EMERGENCY, CYAN/WHITE	
LLS360-MILX3-8-40-FD-CW	LIGHT, SSL30W, 120VAC, FLUSH MOUNT, NON-EMERGENCY, CYAN/WHITE	

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES:
 ANGULAR ± .05 DEG
 TWO PLACE DECIMAL ±0.01
 THREE PLACE DECIMAL ±0.005

PROPRIETARY AND CONFIDENTIAL	MATERIAL: DIECAST ALUMINUM	CHECKED: DARRELL P.	NAME: DARRELL P.	DATE: 9/6/24
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.	FINISH: POWDERCOAT	ENG APPR: DARRELL P.		
	DO NOT SCALE DRAWING	MFG APPR: DARRELL P.		

LLS360, GEN2, FLUSH MNT, NON-EM
 SIZE: D DWG. NO.: LLS360-MILXX-X-40-FD-XX REV: A
 SCALE: 2:3 CAGE CODE: 6Q972 SHEET 1 OF 2