



SSL-560 Globe Fixture

Product Features

- Power: 115VAC 50/60Hz
- 5-25 Watts
- White, Blue, Amber and Red
- 100,000 Hours
- Under 6 lbs (Cord not included)
- High Impact Heat-Resistant Tempered Glass
- Die Cast Aluminum Body, SS Hardware
- 3-10' Military Grade Cord Available
- Powder Coated, Anti-Corrosion
- 4 Hole Aluminum Bracket (Legacy Hole Patterns)
- MIL-DTL16377 Compliant



Ordering Part Number

SSL-560-

92.2
SM White Globe
93.2
SM Red Globe
93.4
SM Blue Globe
93.5
SM Amber Globe
112
LG White Globe
113
LG Red Globe
113.1
LG Yellow Globe

0
No Cable
3
3' LSTHOF-3 Cable
6
6' LSTHOF-3 Cable
10
10' LSTHOF-3 Cable


Configuration Example

Part No. SSL-560-92.2-3


Description LED Globe, 4000K (White), 3' LSTHOF-3 Cable

- Colored LED's operate at 5 Watts
- White LED's operate at 25 Watts
- Large Globe comes with Bracket, see diagram below
- Small Globe does not come with Bracket or Hardware.

Dimensions

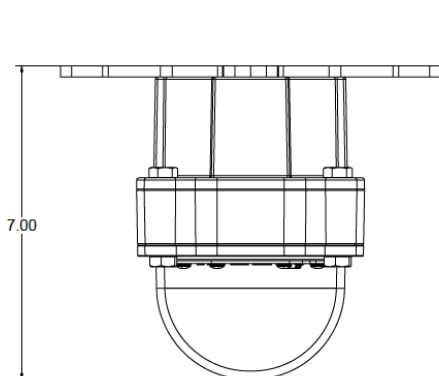

M16377/26 OPTION
5LBS 6OZ

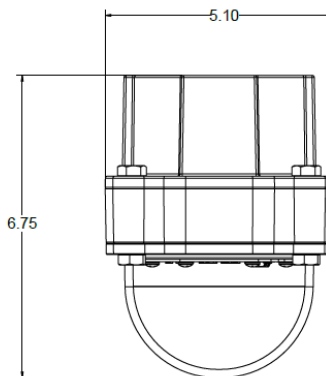

M16377/27 OPTION
3LBS 15OZ

