



LED LIGHTING SOLUTIONS

Precision Lighting for Naval Defense Platforms



SSL-M24 Triple Low Voltage

Symbol Equivalent 333.1, 333.2, 342.2 & 342.3

Features

- Power: 20-30VDC (Triple Array)
- Dual Shock Mounts
- Light weight, Under 8lbs
- Stainless Steel Fasteners
- Color Options: White, Red & NVD CYAN (NV)
- Battery Backup - 5 Hours
- Die Cast Aluminum Construction
- LSTHOF-3 and LSFHOF-3 Cable Available
- 7XW-3 EM Cable
- White Diffusing Lens
- Marine Grade White Powder Coating Finish
- MIL-DTL16377 Compliant



Ordering Part Number

SSL-M243VDC

| |
|-----------------|
| 333.1 |
| 333.2 |
| *333.1EM |
| *333.2EM |
| **342.2 |
| **342.3 |

| |
|----------------|
| S |
| Standard Mount |
| F |
| Flush Mount |

| |
|--------------|
| WH |
| White |
| BL |
| Blue |
| RD |
| Red |
| NV |
| Night Vision |

| |
|-------------------|
| S |
| DPST Switch |
| SS |
| Two DPST Switches |

| |
|--------------------|
| 0 |
| No Cable |
| LST10 |
| 10' LSTHOF-3 Cable |
| LST15 |
| 15' LSTHOF-3 Cable |
| LSH10 |
| 10' LSFHOF-3 Cable |
| LSF10 |
| 10' LSFHOF-10' |
| 7XW3 |
| EM Cable |
| DM |
| 0-10V Dimming |


*EM units will be provided with 7XW-3 Cable.

**Symbols 342.2 and 342.3 refer to prismatic lens fixtures, which are no longer necessary due to LED technology. Orders placed for either symbol will be shipped with our diffused lens

Part No. SSL-M243VDC-333.1-S-WH-S-LST10

Description LED 2', Triple, 24VDC, 333.1, Standard Mount, White (4100K), DPST Switch, 10' LSTHOF-3 Cable

Symbol 333.1/342.2

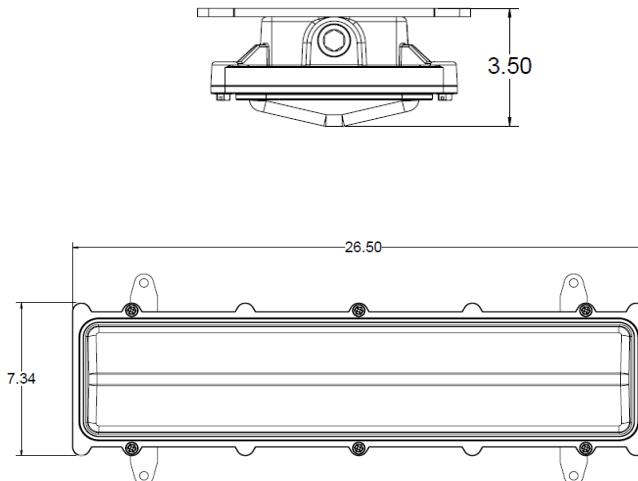

Symbol 333.2/342.3

