



LED LIGHTING SOLUTIONS

Precision Lighting for Naval Defense Platforms



MILX12 High Bay Low Voltage

M16377/85 - Symbol 76 Equivalent

Product Features

- Power: 20-30VDC
- 0-10V Dimming
- 120 Watts (4100K)
- 20 Watts (Colored)
- White, Red, NVD Options
- 38 lbs
- 100,000 Life Hours
- Die-Cast Aluminum Body
- Polycarbonate Lens
- Stainless Steel Hardware
- Three Shock Mounts
- 3/4" Cord Grip
- Input Port within each head
- MIL-DTL-16377 Compliant
- ABS



©LEDLIGHTINGSOLUTIONS DIRECT.Info@1LLS.com OFFICE.855.309.1702 FAX.941.296.7313
WWW.LEDLIGHTINGSOLUTIONS.COM

All rights reserved. LED Lighting Solutions reserves the right to change specifications for product improvement without prior notice

Ordering Part Number

LLS360-MILX12VDC

40

8	SD	EM	0
Medium Lens	Standard Mount	Emergency	No Cable
F	FD	EMRW	LST10
Flat Lens	Flush Mount	Emergency Red	10' LSTHOF-3 Cable
		EMCW	LST15
		Emergency Cyan	15' LSTHOF-3 Cable
			LSH10
			10' LSFHOF-3 Cable
			LSF10
			15' LSFHOF-10'
			7XW3
			EM Cable
			DM
			0-10V Dimming

EM units will be provided with 7XW-3 Cable.


*EM units will be provided with 7XW-3 Cable.

Configuration Example

Part No. LLS360-MILX12VDC-8-40-SD

Description : LED MILX12, 20-30VDC, Medium Lens, 4100K, Standard Mount, Non-EM, No Cable

Medium Lens Shown Below

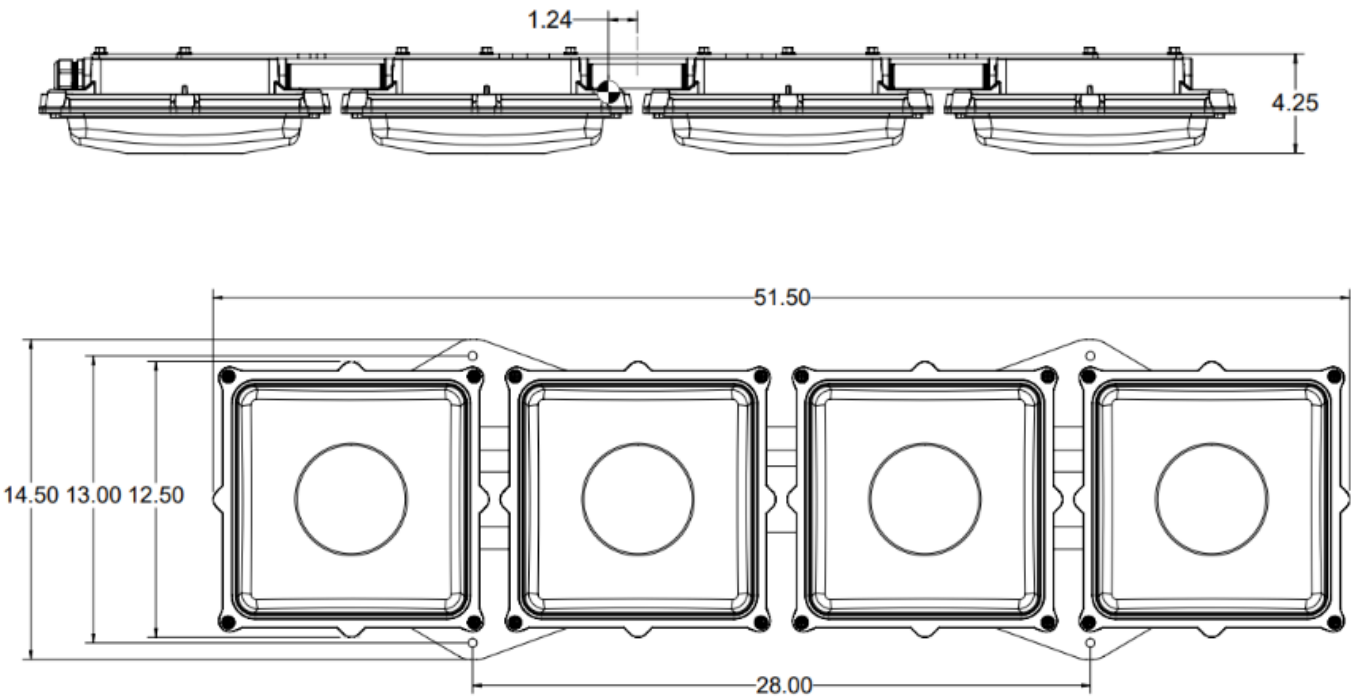

Flat Lens Shown Below

