



LLS360 HAZLOC

Product Features

- 120/277VAC or 347/480VAC
- UL1598
- UL 598A
- UL8750
- UL 44 Class 1, Division 2 (A,B,C&D)
- ABS
- IP66/67
- T4A or Better
- 4000K, Red, NVD, Amber
- Emergency Battery Backup (90 Min)
- 25-55 Watts
- 8lbs
- A360 Die-Cast Aluminum Body
- Polycarbonate Lens
- Stainless Steel Hardware
- 3/4" Input Port
- Adjustable Yolk and Fixed Mounts



Yolk Mount

Ordering Part Number

LLS360-HAZ

25 25W- 120/277VAC	40 4000K	LV 120/277VAC	VM Vessel Mount	MD Medium Lens	EM Emergency
35 35W-120/277VAC	50 5000K	HV 347/480VAC	YM Yolk Mount	FL Flat Lens	CB 10' 3-Wire Cable
38 38W- 347/480VAC	RD Red				
47 45W- Either Voltage	AM Amber				
55 55W- 347/480VAC	NVD Night Vision				


Configuration Example

Part No. LLS360-HAZ-47-50-LV-YM-MD

Description : LED HAZLOC, 47 Watts, 5000K, 120/277VAC, Yolk Mount, Medium Lens

Leave blank when not choosing EM or CB options

Dimensions

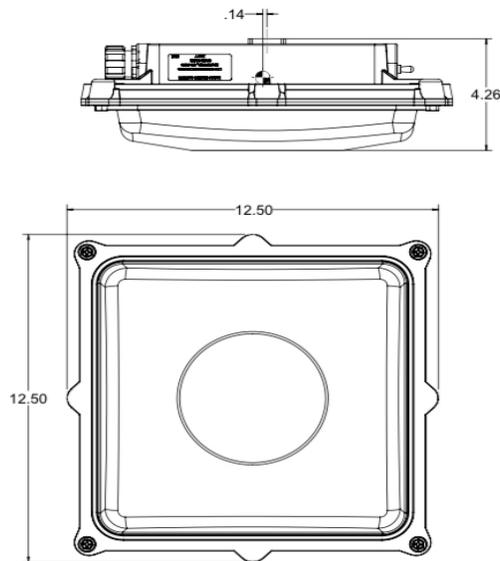

Medium Lens

Flat Lens

