



LED LIGHTING SOLUTIONS

Precision Lighting for Naval Defense Platforms



SSL-M24 Triple LED

Symbol Equivalent 333.1, 333.2, 342.2 & 342.3

Features

- Triple LED Array, Powered by 120V, 60Hz Driver
- Dual Shock Mounts
- Light weight, Under 9lbs
- Stainless Steel Fasteners
- Color Options: White, Red & NVD CYAN (NV)
- Battery Backup - 5 Hours
- Die Cast Aluminum Construction
- LSTHOF-3 and LSFHOF-3 Cable Available
- 7XW-3 EM Cable
- White Diffusing Lens
- Marine Grade White Powder Coating Finish
- MIL-DTL16377 Compliant



Ordering Part Number

SSL-M24-

333.1
333.2
*333.1EM
*333.2EM
**342.2
**342.3

S
Standard Mount
F
Flush Mount

WH
White
BL
Blue
RD
Red
NV
Night Vision

S
DPST Switch
SS
Two DPST Switches

0
No Cable
LST10
10' LSTHOF-3 Cable
LST15
15' LSTHOF-3 Cable
LSH10
10' LSFHOF-3 Cable
LSF10
10' LSFHOF-10'
7XW3
EM Cable

*EM units will be provided with 7XW-3 Cable.




**Symbols 342.2 and 342.3 refer to prismatic lens fixtures, which are no longer necessary due to LED technology. Orders placed for either symbol will be shipped with our diffused lens

Configuration Example

Part No. SSL-M24-333.1-S-WH-S-LST10

Description 2' Triple, 333.1, Standard Mount, Diffused lens, White (4100K), DPST Switch, 10' LSTHOF-3 Cable

Symbol 333.1/342.2

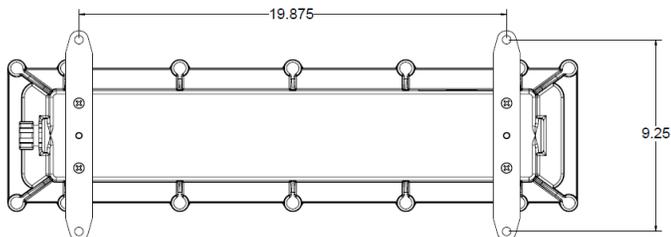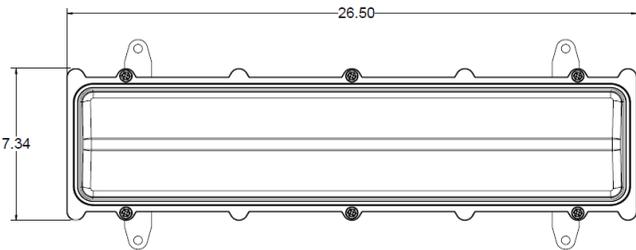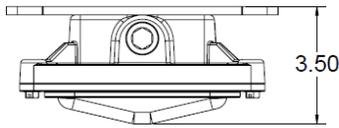

Symbol 333.2/342.3

