



# LED LIGHTING SOLUTIONS

*Precision Lighting for Naval Defense Platforms*



## ***SSL-M24 Single LED***

**Symbol 331.1 & 331.2, Equivalent**

### **Features**

Single LED Array, Powered by 120V, 60Hz Driver

Dual Shock Mounts

Light weight, Under 9lbs

Stainless Steel Fasteners

Color Options: White, Red & NVD CYAN (NV)

Battery Backup - 5 Hours

Die Cast Aluminum Construction

LSTHOF-3 and LSFHOF-3 Cable Available

7XW-3 EM Cable

White Diffusing Lens

Marine Grade White Powder Coating Finish

MIL-DTL16377 Compliant



## Ordering Part Number

### SSL-M24-

<b>331.1</b>	<b>S</b>	<b>WH</b>	<b>S</b>	<b>0</b>
<b>331.2</b>	Standard Mount	White	DPST Switch	No Cable
<b>331.1EM</b>	<b>F</b>	<b>BL</b>	<b>SS</b>	<b>LST10</b>
<b>331.2EM</b>	Flush Mount	Blue	Two DPST Switches	10' LSTHOF-3 Cable
<b>**347.2</b>		<b>RD</b>		<b>LST15</b>
<b>**347.3</b>		Red		15' LSTHOF-3 Cable
		<b>NV</b>		<b>LSH10</b>
		Night Vision		10' LSFHOF-3 Cable
				<b>LSF10</b>
				10' LSFHOF-10'
				<b>7XW3</b>
				EM Cable

\*EM units will be provided with 7XW-3 Cable.


\*\*Symbols 347.2 and 347.3 refer to prismatic lens fixtures, which are no longer necessary due to LED technology. Orders placed for either symbol will be shipped with our diffused lens

## Configuration Example

**Part No.** SSL-M24-331.1-S-WH-S-LST10

**Description** 2' Single, 331.1, Standard Mount, Diffused lens, White (4100K), DPST Switch, 10' LSTHOF-3 Cable

## Symbol 331.1/347.2 Standard Mount

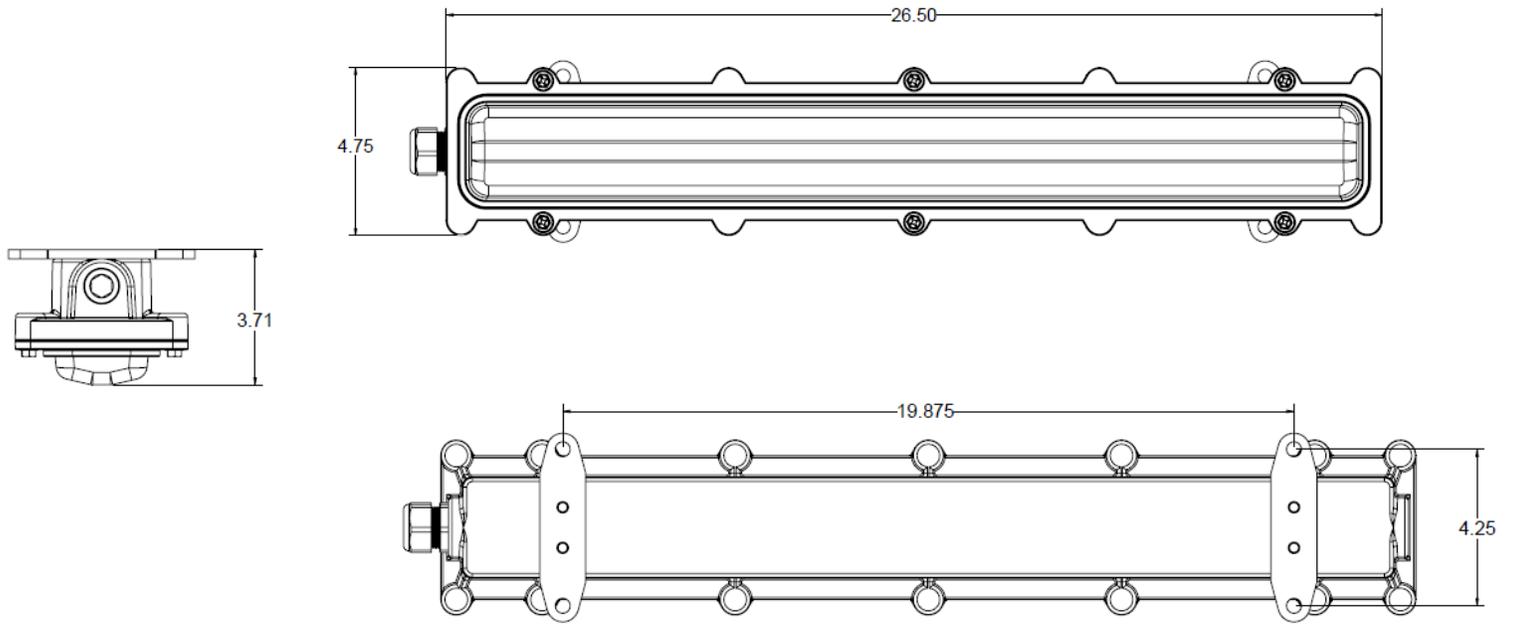

## Symbol 331.2/347.3 Standard Mount

