



LED LIGHTING SOLUTIONS

Precision Lighting for Naval Defense Platforms



LLS360 Low Voltage

Product Features

- Power: 20-30VDC
- 0-10V Dimming
- UL 1598
- UL 1598A
- UL8750
- UL 844 Class 1, Division 2 (A,B,C & D)
- ABS
- MIL-16377 Compliant
- IP66/67
- Emergency Battery Backup (4-6 Hour)
- 5lbs (w/o Cable)
- A360 Die-Cast Aluminum Body
- Marine Grade Powder Coating
- Polycarbonate Lens
- Stainless Steel Hardware
- 3/4" Input Port
- Flush or Standard Configurations



©LEDLIGHTINGSOLUTIONS DIRECT.Info@1LLS.com OFFICE.855.309.1702 FAX.941.296.7313
WWW.LEDLIGHTINGSOLUTIONS.COM

All rights reserved. LED Lighting Solutions reserves the right to change specifications for product improvement without prior notice

Ordering Part Number

LLS360

40

<table><tr><td>MILX124</td></tr><tr><td>Sym. 331.1/24VDC</td></tr><tr><td>MILX224</td></tr><tr><td>Sym. 77.4/24VDC</td></tr><tr><td>MILX324</td></tr><tr><td>Sym. 333.1/24VDC</td></tr><tr><td>MILX424</td></tr><tr><td>4,100 Lm/24VDC</td></tr><tr><td>MILX524</td></tr><tr><td>5,100 Lm/24VDC</td></tr><tr><td>MILX624</td></tr><tr><td>6,100 Lm/24VDC</td></tr></table>	MILX124	Sym. 331.1/24VDC	MILX224	Sym. 77.4/24VDC	MILX324	Sym. 333.1/24VDC	MILX424	4,100 Lm/24VDC	MILX524	5,100 Lm/24VDC	MILX624	6,100 Lm/24VDC	<table><tr><td>8</td></tr><tr><td>Medium Lens</td></tr><tr><td>F</td></tr><tr><td>Flat Lens</td></tr></table>	8	Medium Lens	F	Flat Lens	<table><tr><td>SD</td></tr><tr><td>Standard Mount</td></tr><tr><td>FD</td></tr><tr><td>Flush Mount</td></tr></table>	SD	Standard Mount	FD	Flush Mount	<table><tr><td>0</td></tr><tr><td>No Cable</td></tr><tr><td>LST10</td></tr><tr><td>10' LSTHOF-3 Cable</td></tr><tr><td>LST15</td></tr><tr><td>15' LSTHOF-3 Cable</td></tr><tr><td>LSH10</td></tr><tr><td>10' LSFHOF-3 Cable</td></tr><tr><td>LSF10</td></tr><tr><td>15' LSFHOF-10'</td></tr><tr><td>7XW3</td></tr><tr><td>EM Cable</td></tr></table>	0	No Cable	LST10	10' LSTHOF-3 Cable	LST15	15' LSTHOF-3 Cable	LSH10	10' LSFHOF-3 Cable	LSF10	15' LSFHOF-10'	7XW3	EM Cable	<table><tr><td>EM</td></tr><tr><td>Emergency</td></tr><tr><td>EM4</td></tr><tr><td>1000lm/4 Hour EM</td></tr><tr><td>EM6</td></tr><tr><td>6 Hour EM</td></tr><tr><td>EM6R</td></tr><tr><td>6 Hour EM Red</td></tr><tr><td>RE</td></tr><tr><td>Remote EM</td></tr><tr><td>*CW/GW</td></tr><tr><td>NVD Cyan (NV) White</td></tr><tr><td>RR</td></tr><tr><td>Red/Red</td></tr><tr><td>RW</td></tr><tr><td>Red/White</td></tr><tr><td>RW10</td></tr><tr><td>Red/White -10W Red</td></tr><tr><td>RW40</td></tr><tr><td>Red/White -40W Red</td></tr></table>	EM	Emergency	EM4	1000lm/4 Hour EM	EM6	6 Hour EM	EM6R	6 Hour EM Red	RE	Remote EM	*CW/GW	NVD Cyan (NV) White	RR	Red/Red	RW	Red/White	RW10	Red/White -10W Red	RW40	Red/White -40W Red	<table><tr><td>S</td></tr><tr><td>Switch</td></tr><tr><td>SS</td></tr><tr><td>Switched</td></tr></table>	S	Switch	SS	Switched	<table><tr><td>AO</td></tr><tr><td>All one Bracket</td></tr><tr><td>TL</td></tr><tr><td>Task Lighting</td></tr><tr><td>C1D2</td></tr><tr><td>HAZLOC</td></tr><tr><td>DA</td></tr><tr><td>Dampa</td></tr><tr><td>DM</td></tr><tr><td>0-10V Dimming</td></tr></table>	AO	All one Bracket	TL	Task Lighting	C1D2	HAZLOC	DA	Dampa	DM	0-10V Dimming
MILX124																																																																								
Sym. 331.1/24VDC																																																																								
MILX224																																																																								
Sym. 77.4/24VDC																																																																								
MILX324																																																																								
Sym. 333.1/24VDC																																																																								
MILX424																																																																								
4,100 Lm/24VDC																																																																								
MILX524																																																																								
5,100 Lm/24VDC																																																																								
MILX624																																																																								
6,100 Lm/24VDC																																																																								
8																																																																								
Medium Lens																																																																								
F																																																																								
Flat Lens																																																																								
SD																																																																								
Standard Mount																																																																								
FD																																																																								
Flush Mount																																																																								
0																																																																								
No Cable																																																																								
LST10																																																																								
10' LSTHOF-3 Cable																																																																								
LST15																																																																								
15' LSTHOF-3 Cable																																																																								
LSH10																																																																								
10' LSFHOF-3 Cable																																																																								
LSF10																																																																								
15' LSFHOF-10'																																																																								
7XW3																																																																								
EM Cable																																																																								
EM																																																																								
Emergency																																																																								
EM4																																																																								
1000lm/4 Hour EM																																																																								
EM6																																																																								
6 Hour EM																																																																								
EM6R																																																																								
6 Hour EM Red																																																																								
RE																																																																								
Remote EM																																																																								
*CW/GW																																																																								
NVD Cyan (NV) White																																																																								
RR																																																																								
Red/Red																																																																								
RW																																																																								
Red/White																																																																								
RW10																																																																								
Red/White -10W Red																																																																								
RW40																																																																								
Red/White -40W Red																																																																								
S																																																																								
Switch																																																																								
SS																																																																								
Switched																																																																								
AO																																																																								
All one Bracket																																																																								
TL																																																																								
Task Lighting																																																																								
C1D2																																																																								
HAZLOC																																																																								
DA																																																																								
Dampa																																																																								
DM																																																																								
0-10V Dimming																																																																								

and GW are Interchangeable


Configuration Example

Part No. LLS360-MILX324-8-40-SD-LST15-S-DM

Description : LLS360, MILX3, 24VDC, Medium Lens, 4100K, Standard Mount, 15' LSTHOF-3 Cable, Switch, 0-10V Dimming

Any options not chosen can be left blank when building part number

Standard/Medium Lens

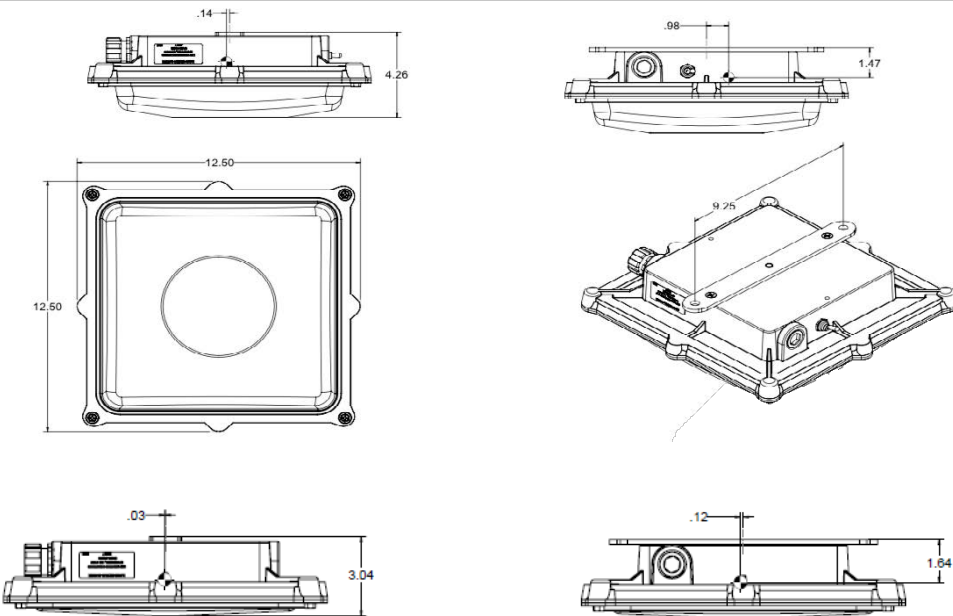

Flush/Flat Lens

